
NORLYS GRIMSTAD 1546

AC 220-240V 50-60Hz | IP 65 | IK 08 | E14

Grimstad
1546XX0010
16.09.2026 v.10.5
www.norlys.no



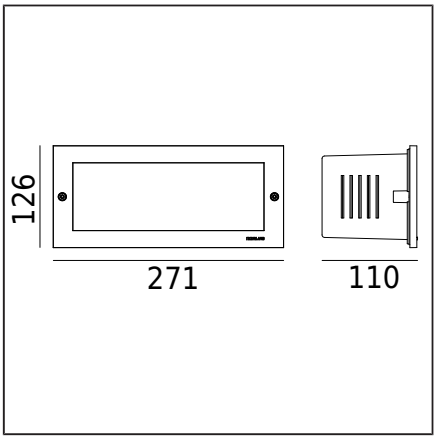

Type of luminaire

Type of luminaire	Recessed wall luminaire.
Photometric body	Diffused light.
Characteristics of the luminaire	The luminaire is suitable for lighting stairs, steps, staircases, pathways, and other places

General information

Materials	Powder painted aluminum cast. Lens - safety glass, milky colour. Silicone gasket. EPDM cable gland.
Mounting method	Mounting of the luminaire: embedded in the wall - hole 258x112x115, fixing in a layered wall - hole 235x96x82
Terminal	Connection terminals: max 3x2.5mm², Possibility to connect the luminaire in loops, max 3x1.5mm². Round insulated cable with a diameter of ø7 ... 10.5mm
Type of light source	E14 Lamp Replaceable light source by an end-user.
Luminaire weight net / gross	1,44kg / 1,6kg
Box dimensions [cm]	27cm x 12,5cm x 11,5cm

Technical data

E14 Bulb	QB35
Light source wattage	max 46W / LED 6W
Ambient operating temp. range	-20...+45°C
BUG rating	B0-U1-G0

Spare parts

06152000	Lampshade - service kit
08154000	Gasket.

Files to download

Manual

Indexes

Index	Color	RAL
1546AL	ALUMINUM	9006
1546GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the client's request. LED module replaceable by a person with appropriate qualifications, following applicable regulations. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire