
NORLYS GRIMSTAD 1547

AC 220-240V 50-60Hz | IP 65 | IK 09 | E14

Grimstad
1547XX0010
16.09.2026 v.10.5
www.norlys.no



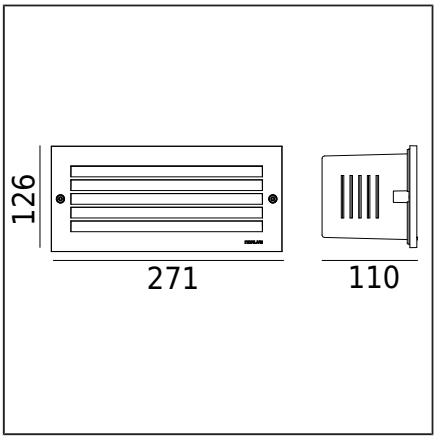

Type of luminaire

Type of luminaire	Recessed wall luminaire.
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Fixture adapted for illuminating stairs, steps, staircases, corridors, and other applications.

General information

Materials	Powder painted aluminum cast. Lens - safety glass, milky colour. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: wall-mounted - opening 258x112x115, layered wall mounting - opening 235x96x82.
Terminal	Connection terminals: max 3x2.5mm², possibility of connecting the fixture in a loop max 3x1.5mm². Round cable with a diameter of ø7...10.5mm.
Type of light source	E14 Lamp Replaceable light source by an end-user.
Luminaire weight net	1,5kg
Box dimensions [cm]	27cm x 12,5cm x 11,5cm

Technical data

E14 Bulb	QB35 / LED B38
Light source wattage	max 46W / LED 7W
Ambient operating temp. range	-20...+45°C

Spare parts

06152000	Lampshade - service kit
08154000	Gasket.

Files to download

3D models and drawings	Manual

Indexes

Index	Color	RAL
1547AL	ALUMINUM	9006
1547GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting installation, it is necessary to read the instructions included with the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.