
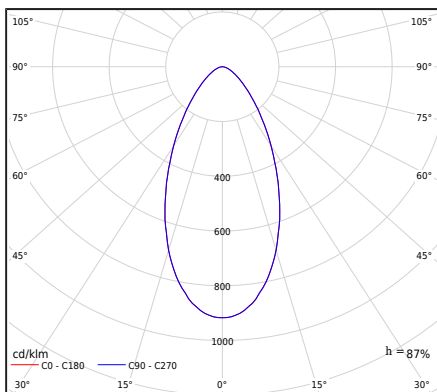


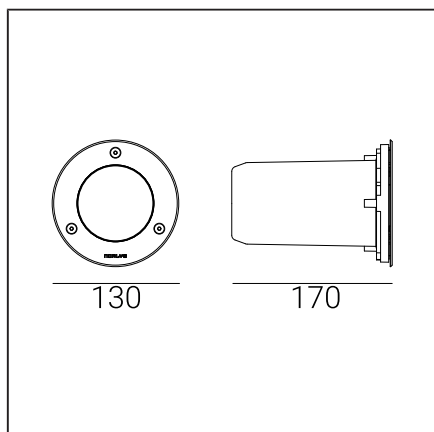

[m]		E(0°)	E(C90)	E(C0)
0.5	0.48 0.43	1274	25.6° 406	23.2° 496
1.0	0.96 0.86	319	25.6° 101	23.2° 124
1.5	1.44 1.29	142	25.6° 45	23.2° 55
2.0	1.92 1.71	80	25.6° 25	23.2° 31
2.5	2.40 2.14	51	25.6° 16	23.2° 20
3.0	2.87 2.57	35	25.6° 11	23.2° 14

Art.nr	El.nummer	Farge	RAL
1554ST	3120031	RUSTFRITT STÅL	-

Generell informasjon	
Type armatur	Inground armatur
Materiale	Pulver lakkert aluminiumstøp Front - Rustfritt stål
Avdeknings materiale/optikk	Glass - herdet, frostet
Pakning	Silikonpakning
Andre materialer	Nikkelbelagt messingnippel.
Type lyskilde	GU10 LED, 40D inkl.
Lysstyring	Dimbar (Triac) TRAILING EDGE (TE) - LEADING EDGE (LE)
Netto vekt armatur	1,01kg
Forpakkingsstørrelse [cm]	15,6cm x 15,6cm x 19,4cm

Tekniske data	
Armatureffekt	5,4W
Stream / luminous intensity of the luminaire	281lm / 319cd
Fargetemperatur	3000K
Fargegjengivelsesindeks	90
L70B50	50 000h
Virkningsgrad	PF 0,85
Maksimal omgivelsestemperatur	Ta max=+65°C
BUG-vurdering	B0-U3-G0

Tilbehør Selges separat	
143ZX0009	Kabelbeskyttelse
145ZX0009	Koblingsboks
146ZX0009	Koblingsboks

Filer som kan lastes ned

Photometric LDT files, Photometric IES files, 3D-modeller og tegninger, Manual