
NORLYS ARENDAL 1560

AC 220-240V 50-60Hz | IP 55/65 | IK 06 | E27

Arendal 1560XX0012
16.09.2026 v.12.16
www.norlys.no



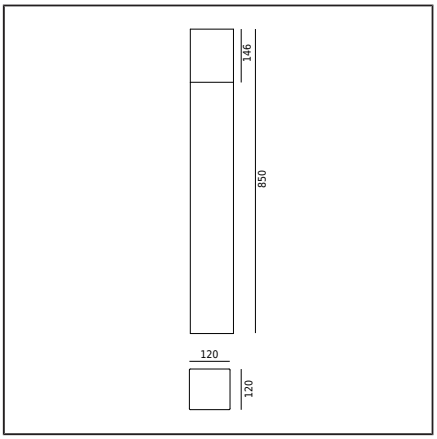

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Light discovered
Characteristics of the luminaire	Modern design luminaire with a combination of decorative crystal lampshade and durable and stable casing

General information

Materials	Powder-coated steel. Lens - crystal glass, satin inside. The lampshade may take on an amber color over time.
Mounting method	Fixing of the luminaire: 3 holes ø9mm with a diameter of ø65mm every 120°.
Terminal	Connection terminals: max 3x4mm², possibility to connect luminaire in loop max 3x2,5mm². Round insulated cable with a diameter of max ø12,5mm.
Type of light source	Lamp E27 A55...A60 Replaceable light source by an end-user.
Luminaire weight net / gross	14,26kg / 15,71kg
Box dimensions [cm]	97cm x 18,5cm x 18,5cm
Luminaire dimensions [cm]	85cm x 12cm x 12cm

Technical data

Lamp E27	LED A55..60
Light source wattage	LED max 9W
Luminaire wattage	LED max 9W
ULOR	75%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

Possibility to order the luminaire with LED E27 Philips Master LEDbulb 806lm / 8,5W / 2700K (dimmable).

Accessories sold separately

3086GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Spare parts

915600229	Lampshade - service kit

Files to download

Manual

Indexes

Index	Color	RAL
1560BL	BLACK	9005
1560GR	GRAPHITE	7016
1560GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Please read the manual before installing it. Due to the dynamic development of lighting technology, additional information is available upon request. LED modules must be replaced by a qualified person in accordance with applicable regulations. Condensation, which can occur in luminaires, is a natural phenomenon and does not impair the quality of the luminaire.