

NORLYS ARENDAL MINI 1561


AC 220-240V 50-60Hz | IP 65 | IK 06 | LED | DIM

Arendal mini
1561XX0010
16.09.2026 v.10.7
www.norlys.no



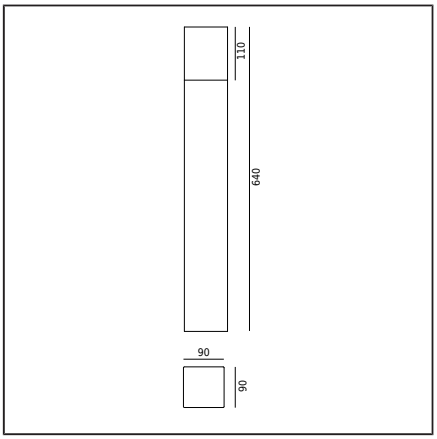

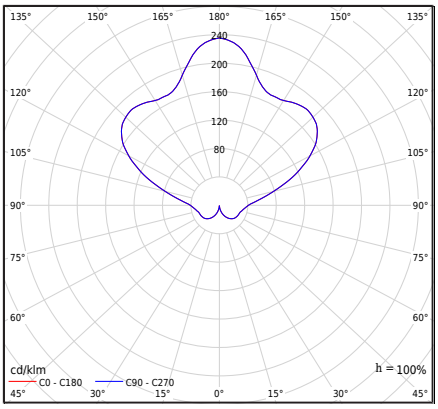

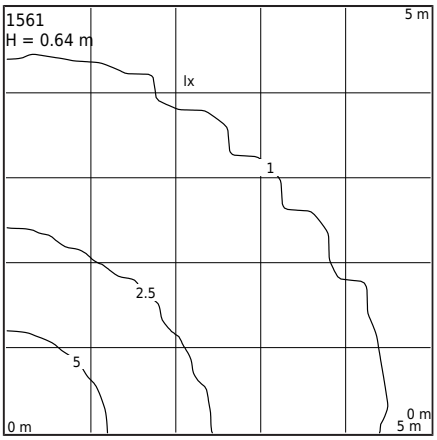

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Light discovered
Characteristics of the luminaire	A luminaire with a modern design, which combines a decorative crystal lampshade with a durable and stable base.

General information

Materials	Hot-dip galvanized steel. Hot-dip galvanized and powder-coated steel. Lens - crystal glass, satin inside. The lampshade may take on an amber color over time.
Mounting method	Mounting of the luminaire: 2 holes ø6.8mm at a distance of 38mm
Terminal	Connection terminals: max 2x2.5mm² Possibility of connecting the luminaire in loops of max. 2x2.5mm² Round insulated cable with a maximum diameter of ø12.5mm
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	6,06kg / 6,68kg
Box dimensions [cm]	89,5cm x 11,5cm x 11,5cm

Technical data

LED module	Lumens EDC 38C 4W xxx 230V A101 3K (Datasheet)
External control	Phase dimmer Lumens LED AC (User manual)
Light source wattage	4W
Luminaire wattage	4W
Lamp luminous flux	439lm
Luminaire luminous flux	330lm
Efficiency of the luminaire	82,5lm/W
ULOR	83%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>59 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF>0,98
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class A E / EPREL	
Inrush current	17mA / 60ms

Accessories sold separately

204GA0009	Ground anchor
203ZX0009	Concreting anchor

Spare parts

ZS1561zx0010	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
1561BL	BLACK	9005
1561GR	GRAPHITE	7016
1561GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.