
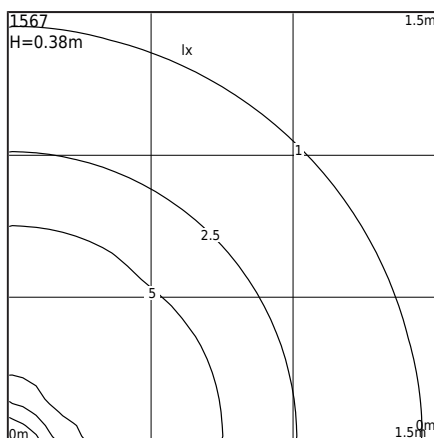
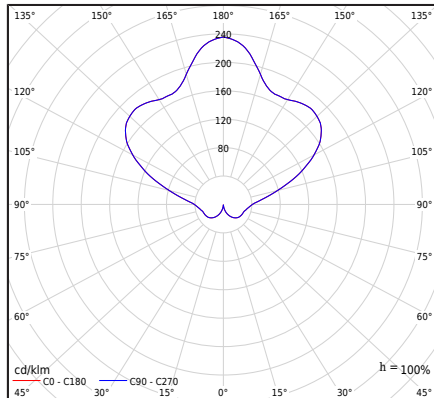


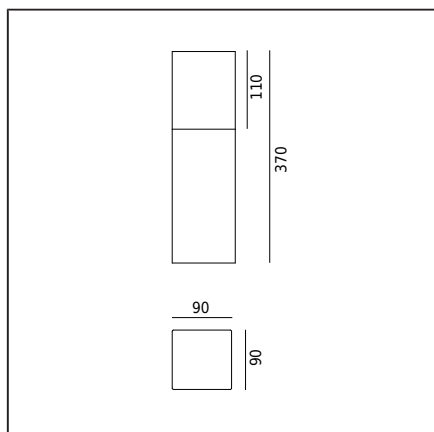

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Light discovered
Characteristics of the luminaire	A luminaire with a modern design, combining a decorative crystal lampshade with a durable and stable luminaire base

General information

Materials	Hot-dip galvanized steel. Hot-dip galvanized and powder-coated steel. Lens - crystal glass, satin inside. Lens may change to light amber colour over time.
Mounting method	Mounting of the luminaire: 2 holes $\varnothing$ 6,8mm, spacing 38mm.
Terminal	Connection terminals: max 2x2,5mm ² , Possibility to connect luminaire in loop max 2x2,5mm ² . Round insulated cable with a diameter of max $\varnothing$ 12,5mm.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)

Technical data

LED module	Yes
External control	Phase dimmer Lumens LED AC (User manual)
Luminaire wattage	4W
Luminaire luminous flux	345lm
Efficiency of the luminaire	86,3lm/W
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70B50 [wg LM-80]	50 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF>0,98
THD factor	< 20%
Ta Rated temperature	+25°C, up to +50°C on request
Ambient temperature	TA MAX=+65°C
Inrush current	17mA / 60ms
BUG rating	B0-U3-G0

Accessories sold separately

204GA0009	Ground anchor
-----------	---------------

Spare parts

ZS1567zx0009	Service set.
--------------	--------------

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
1567BL	BLACK	9005
1567GR	GRAPHITE	7016
1567GA	HOT-DIP GALVANIZING	-