


NORLYS LILLEHAMMER 1580

Lillehammer
1580XX0017
16.09.2026 v.17.24
www.norlys.no



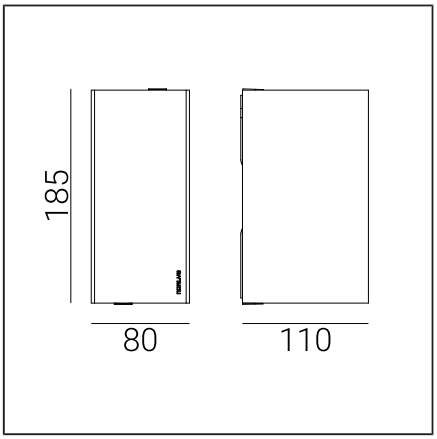

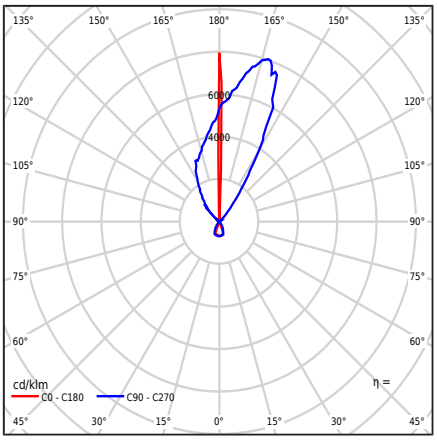

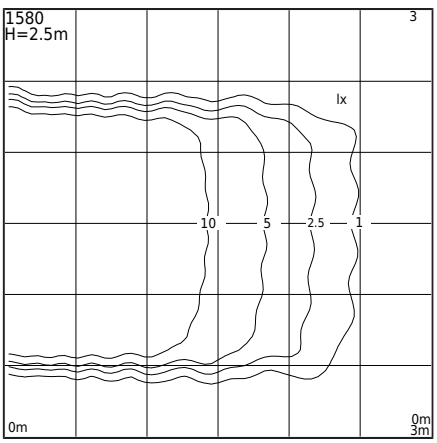

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light with 4° beam angle up and 60° beam angle down and inversely.
Characteristics of the luminaire	A fixture with a wide range of applications, including lighting: wall surfaces, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - safety glass, optical. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 2 holes Ø5mm, spacing 45x130mm. According to the enclosed installation instructions.
Terminal	Connection terminals: max 3x2.5mm², capability to connect the fixture in loop max 3x1.5mm². Cable in a round sheath with a diameter in the range of ø7...10.5 mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	1,7kg / 1,85kg
Box dimensions [cm]	21cm x 12,5cm x 10,5cm
Luminaire dimensions [cm]	18,5cm x 11cm x 8cm

Technical data

2 LED modules	Cree DK180501 V8 JB2835 3V 3K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Light source wattage	5,6W
Luminaire wattage	7,3W
Lamp luminous flux	1008lm
Luminaire luminous flux	130lm
Efficiency of the luminaire	17,8lm/W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0.9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class C / EPREL

Optionally, the fixture is also available:
- for a satin shade
- for LED color 2700K [1/1]
- for a different fixture color (according to the RAL color chart)

Terms of sale and other information, to be discussed with the Sales Department of Norlys.

BUG rating	B0-U2-G0

Spare parts

ZS1580zx0017	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no


TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, one should familiarize themselves with the instructions included with the fixture. Installation and servicing should be carried out by a person with the appropriate authorizations and qualifications, in accordance with existing regulations. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.

LILLEHAMMER 1580



Lillehammer
1580XX0017
16.09.2026 v.17.24
www.norlys.no

Indexes

Index	Color	RAL
1580AL	ALUMINUM	9006
1580BL	BLACK	9005
1580CG	CEMENT GREY	7033
1580CB	COPPER BROWN	8004
1580CS	CORTEN STEEL	approx. 8011
1580GR	GRAPHITE	7016
1580GB	GREY BEIGE	7006
1580WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, one should familiarize themselves with the instructions included with the fixture. Installation and servicing should be carried out by a person with the appropriate authorizations and qualifications, in accordance with existing regulations. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture's quality.