
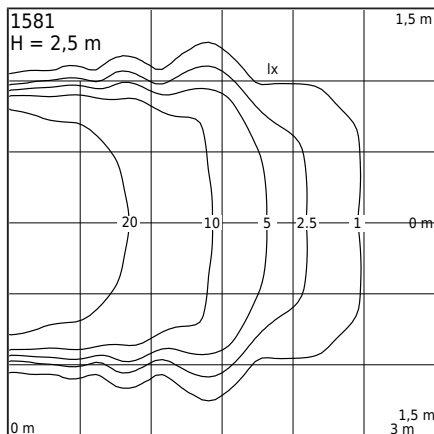
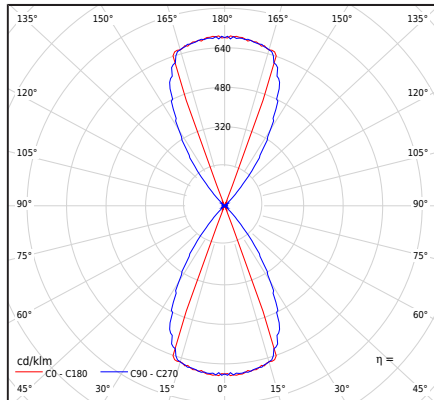


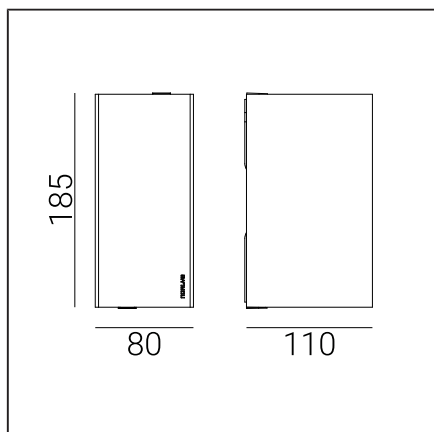

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light with 60° beam angle facing up and down.
Characteristics of the luminaire	Luminaire with a wide range of applications for example for illumination of walls and facade surfaces or any other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - safety glass, optical. Silicone gasket. EPDM cable gland.
Mounting method	Fixing of the luminaire: 2 holes $\varnothing 5\text{mm}$, spacing 45x130mm.
Terminal	Connection terminals: max 3x2,5mm ² , possibility to connect luminaire in loop max 3x1,5mm ² . A round wire in the isolation with a diameter of max $\varnothing 7\text{...}10,5\text{mm}$.
Type of light source	LED module, electronic power supply
Light control	Trailing edge (TE) dimming
Net / gross weight of luminaire	1,5kg / 1,5kg
Box dimensions [cm]	21cm x 12,5cm x 9,5cm

Technical data

Driver durability	50000h
Luminaire wattage	7,1W
Luminaire luminous flux	205lm
Efficiency of the luminaire	28,9lm/W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	50 000h
Power Factor luminaire	PF > 0,9
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C

This product contains light sources of energy efficiency class **A** / **E** EPREL

Inrush current	1A/15,2μs
BUG rating	B0-U3-G0

Maximum number of luminaires of this type per MCB:

B 10A: 157, B 16A: 250, C 10A: 260, C 16A: 425

Spare parts

ZS1581zx0014	Service set.
--------------	--------------

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1581AL	ALUMINUM	9006
1581BL	BLACK	9005
1581GR	GRAPHITE	7016
1581WH	WHITE	9003