
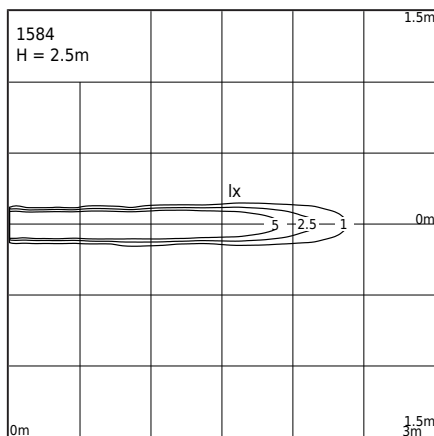
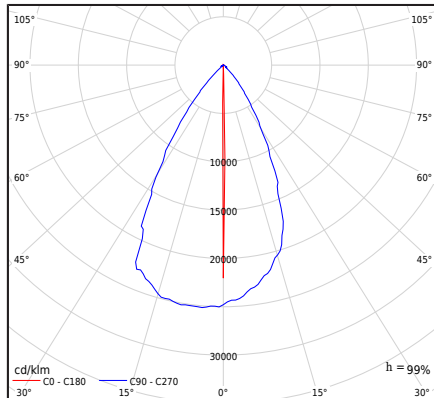


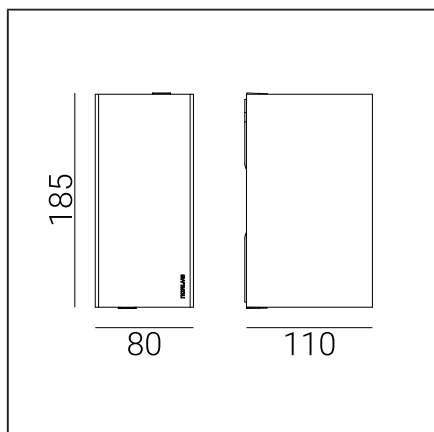

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Single-sided light with 4° beam angle facing down
Characteristics of the luminaire	A luminaire with a wide range of applications, also for lighting: wall surfaces, facades, and other architectural concepts

General information

Materials	Powder painted aluminum cast. Lens - safety glass, optical. Silicone gasket. EPDM cable gland.
Mounting method	Mounting of the luminaire: 2 holes $\varnothing 5\text{mm}$, spacing 45x130mm
Terminal	Connection terminals: max 3x2.5mm ² , Possibility to connect the luminaire in loops, max 3x1.5mm ² . Round insulated cable with a diameter of $\varnothing 7\text{mm}$... 10.5mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by an end-user.
Light control	Trailing edge (TE) dimming
Net / gross weight of luminaire	1,57kg / 1,72kg
Box dimensions [cm]	21cm x 12,5cm x 10,5cm
Luminaire dimensions [cm]	18,5cm x 11cm x 8cm

Technical data

Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Luminaire wattage	4,2W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤ 1
Strobe effect (SVM)	≤ 0.4
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	>72 000h
Power Factor luminaire	PF 0,9
THD factor	20%
Ta Rated temperature	+25°C
Ambient temperature	Ta max=+65°C

This product contains light source of energy efficiency class **E** / **EPREL**

The luminaire is available in the following variants:

- LED 3000K dim. TE
- LED 4000K dim. TE

Inrush current	1A/15,2μs
BUG rating	B0-U0-G0

Spare parts

ZS1584zx0016	Service set.
--------------	--------------

Files to download

BIM Revit	BIM ArchiCAD
-----------	--------------

Indexes

Index	Color	RAL
1584AL	ALUMINUM	9006
1584BL	BLACK	9005
1584GR	GRAPHITE	7016
1584WH	WHITE	9003