

NORLYS LILLEHAMMER 1587


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

Lillehammer
1587XX0009
14.10.2026 v.09.12
www.norlys.no



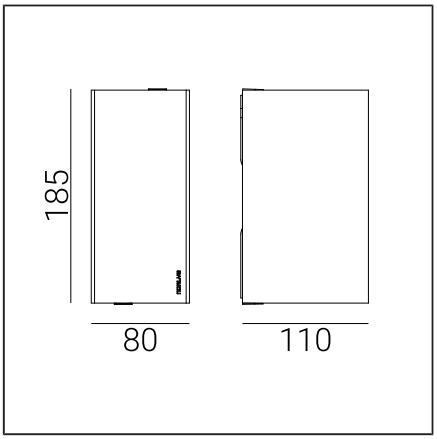

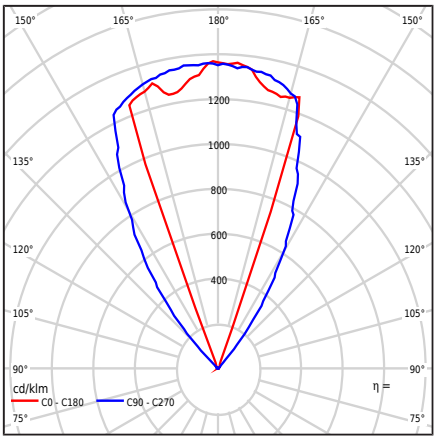

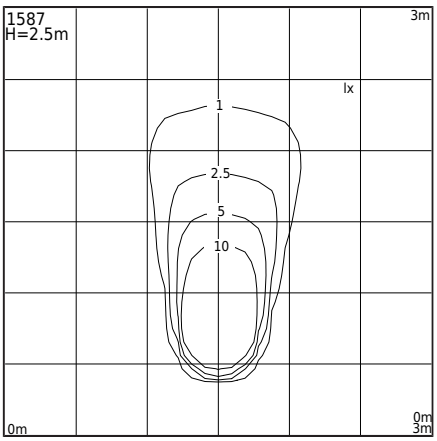

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Single-sided light with 60° beam angle facing up.
Characteristics of the luminaire	A luminaire with a wide range of applications, including lighting wall surfaces, facades and other architectural concepts

General information

Materials	Powder painted aluminum cast. Lens - safety glass, transparent. Silicone gasket. EPDM cable gland.
Mounting method	Luminaire mounting: 2 holes ø5mm, spacing 45x130mm According to the attached assembly instructions
Terminal	Connection terminals: max 3x2.5mm² Possibility of connecting the luminaire in loops of max. 3x1.5mm² Round insulated cable with a diameter in the range of ø7...10.5mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	1,57kg / 1,72kg
Box dimensions [cm]	21cm x 12,5cm x 10,5cm
Luminaire dimensions [cm]	18,5cm x 11cm x 8cm

Technical data

LED module	Cree DK180501 V8 JB2835 3V 3K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Light source wattage	2,8W
Luminaire wattage	4W
Lamp luminous flux	504lm
Luminaire luminous flux	114lm
Efficiency of the luminaire	28,5lm/W
ULOR	100%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,9
THD factor	20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- With a different color of the luminaire (according to the RAL color palette)
Terms of sale and other information, after contact with the Norlys Sales Department

Inrush current	1A / 15,2µs
BUG rating	B0-U3-G0

Spare parts

ZS1587zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations Due to the dynamic development of lighting technology, we provide additional information on request.
Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire

LILLEHAMMER 1587



Lillehammer
1587XX0009
14.10.2026 v.09.12
www.norlys.no

Indexes

Index	Color	RAL
1587AL	ALUMINUM	9006
1587BL	BLACK	9005
1587GR	GRAPHITE	7016
1587WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations Due to the dynamic development of lighting technology, we provide additional information on request.
Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire