
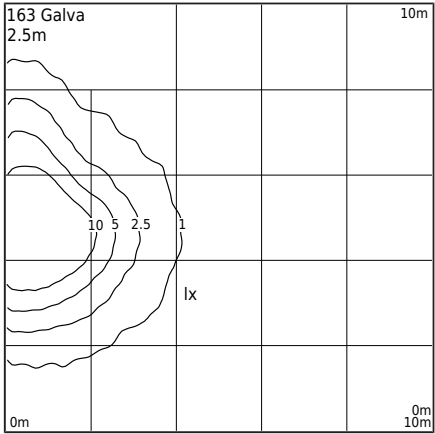
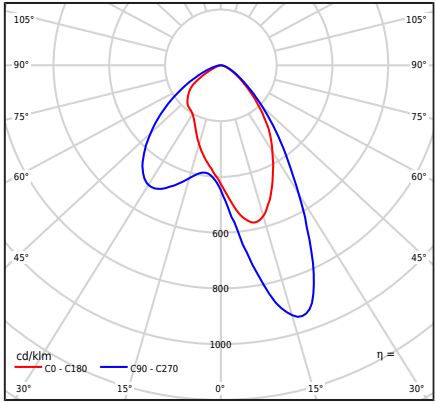


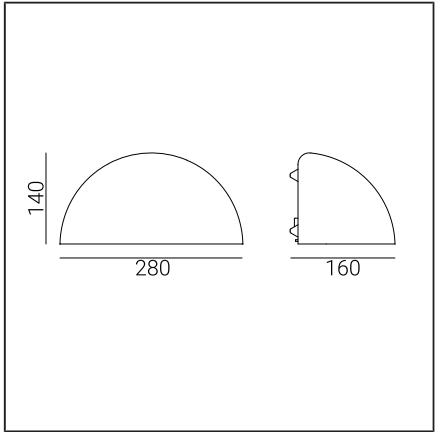

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	Classic design luminaire with a wide range of applications for example for illumination of walls and facade surfaces or any other architectural concepts.

General information

Materials	Hot-dip galvanized steel. Powder painted steel. Lens - satin polycarbonate, UV stabilized . EPDM cable gland.
Mounting method	Fixing of the luminaire: 2 oval holes ø5,5mm, spacing 100mm.
Terminal	Connection terminals: max 3x2,5mm ² , possibility to connect luminaire in loop max 3x1,5mm ² . A round wire in the isolation with a diameter of ø7...10,5mm.
Type of light source	E27 Lamp Replaceable light source by an end-user.
Net / gross weight of luminaire	1,05kg / 1,05kg
Box dimensions [cm]	28,5cm x 17,5cm x 15,5cm
Luminaire dimensions [cm]	28cm x 16cm x 14cm

Technical data

Luminaire wattage	LED max 9W
THD factor	+25°C
Ambient temperature	Ta max=+65°C
BUG rating	B0-U1-G0

Recommended light sources

Osram LED Parathom Classic E27	Philips Master LEDbulb / Ledbulb Classic E27
Osram ECO PRO Classic 46 <=> 60W E27	Philips ECO Classic 42 <=> 60W E27

Spare parts

06163001	Lampshade.
----------	------------

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
163BL	BLACK	9005
163GA	HOT-DIP GALVANIZING	-
163WH	WHITE	9003