
NORLYS GENOVA 170

AC 220-240V 50-60Hz | IP 54 | E27

Genova 170XX0011
16.09.2026 v.11.8
www.norlys.no



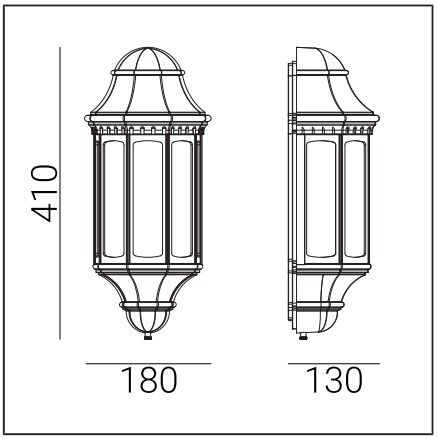

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Light discovered
Characteristics of the luminaire	Luminaire with a classic design for general use. Perfect for lighting of terraces, entrances, gazebos and other architectural concepts

General information

Materials	Powder painted aluminum cast. Lens - clear polycarbonate, UV stabilized. EPDM cable gland.
Mounting method	Luminaire mounting: 2 holes ø5.5mm, spacing 80mm
Terminal	Connection terminals: max 2x2.5mm² Round insulated cable with a diameter of ø7...10.5mm
Type of light source	Lamp E27 A55...A60 Replaceable light source by an end-user.
Luminaire weight net / gross	1,75kg / 1,75kg
Box dimensions [cm]	43cm x 18,5cm x 14cm
Luminaire dimensions [cm]	41cm x 18cm x 13cm

Technical data

Lamp E27	LED A55..60
Light source wattage	LED max 9W
Luminaire wattage	LED max 9W
Ambient operating temp. range	-20...+45°C

Possibility to order a luminaire with an E27 LED
Philips Master LEDbulb 806lm/8.5W/2700K (dimmable)

Files to download

Manual

Indexes

Index	Color	RAL
170BL	BLACK	9005

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Due to the dynamic development of lighting technology, we provide additional information on request.
Information of recommended light sources based on manufacturers' data from 2016. We are not responsible for the completeness and validity of the offer, therefore we refer to the applicable technical information of the manufacturers of light sources. Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire