

NORLYS ASKER 1700


AC 220-240V 50-60Hz | IP 44 | IK 08 | LED | DIM

Asker 1700XX0017
13.10.2026 v.17.2
www.norlys.no



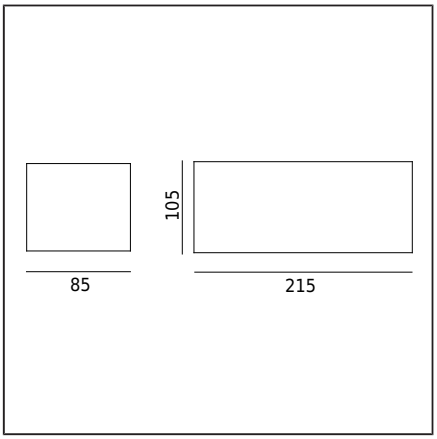

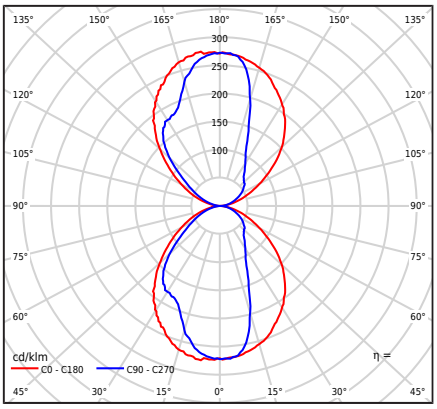

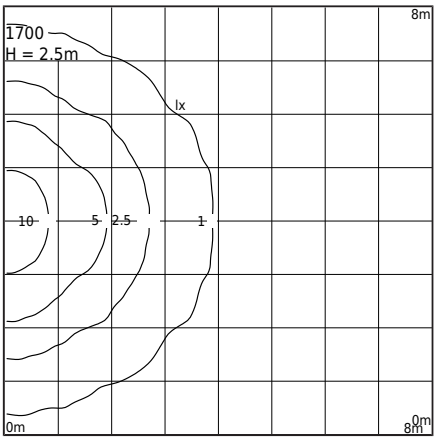

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	A fixture with a wide range of applications, including lighting surfaces, facades, and other architectural concepts.

General information

Materials	Base - powder painted aluminum cast. Body - hot-dip galvanized steel Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	Fixture attachment: 2 holes ø4.5mm, spacing 180x60mm
Terminal	Connection terminals: max 3x2.5mm², possibility of looping the fitting max 3x1.5mm². Round sheath cable with diameter ø7...10.5mm.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	1,62kg / 1,64kg
Box dimensions [cm]	24,5cm x 12,5cm x 10,5cm
Luminaire dimensions [cm]	21,5cm x 8,5cm x 10,5cm

Technical data

LED module	Lumens EDC 57C 8W xxx 230V F201 3K (Datasheet)
External control	Phase dimmer Lumens LED AC (User manual)
Light source wattage	8W
Luminaire wattage	8,4W
Lamp luminous flux	743lm
Luminaire luminous flux	360lm
Efficiency of the luminaire	42,9lm/W
ULOR	50%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>55 000h
Power Factor luminaire	PF 0,95
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class F / EPREL

Optionally, the fixture is also available:
- for LED color 2700K [1/1]
- for a different fixture color (according to the RAL color palette)
Sales terms and additional information upon agreement with the Sales Department of Norlys.

Inrush current	35mA / 60ms
BUG rating	B0-U3-G0

Spare parts

ZS1700zx0011	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1700GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before beginning assembly, familiarize yourself with the instructions attached to the fixture. Assembly and servicing should be carried out by a person with the appropriate authorizations and qualifications, in accordance with current regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not deteriorate the quality of the fixture.