

NORLYS ASKER 1705


AC 220-240V 50-60Hz | IP 44 | IK 08 | LED | DIM

Asker 1705XX0017
13.10.2026 v.17.1
www.norlys.no



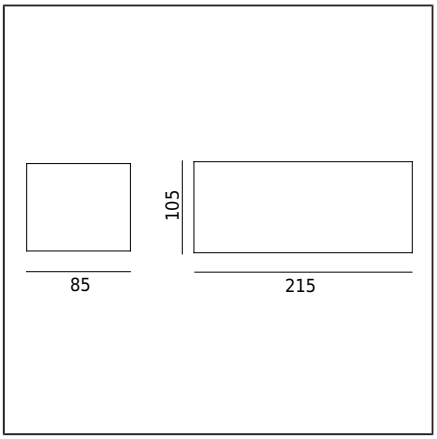

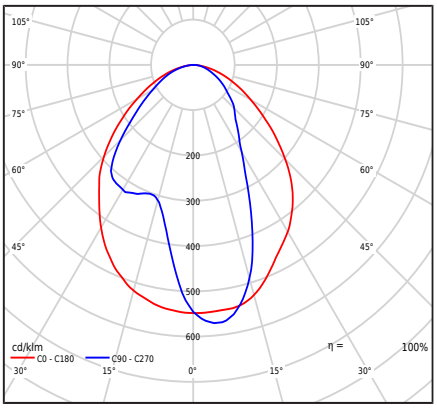

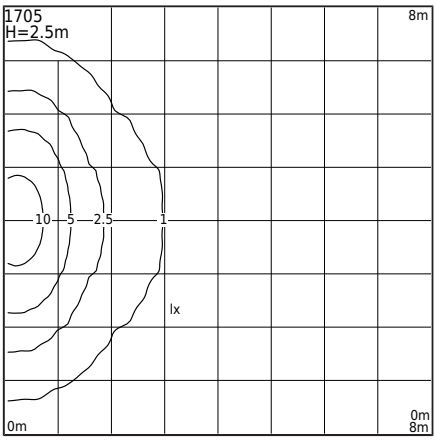

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	A fixture with a wide range of applications, including lighting surfaces of walls, facades, and other architectural concepts.

General information

Materials	Base - powder painted aluminum cast. Body - hot-dip galvanized steel Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	Fixture mounting: 2 holes ø4.5mm, spacing 180x60mm
Terminal	Terminal blocks: max 3x2.5mm², loop connection option for fixture max 3x1.5mm². Round cable with diameter ø7...10.5mm.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Box dimensions [cm]	24,5cm x 12,5cm x 10,5cm

Technical data

LED module	Lumens EDC 57C 8W xxx 230V F201 3K (Datasheet)
External control	Phase dimmer Lumens LED AC (User manual)
Light source wattage	8W
Luminaire wattage	8W
Lamp luminous flux	840lm
Luminaire luminous flux	165lm
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>55 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF 0,95
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class F / EPREL	
Inrush current	35mA / 60ms
BUG rating	B0-U0-G0

Spare parts

ZS1705zx0011	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1705GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting installation, familiarize yourself with the instructions included with the lighting fixture. Due to the dynamic development of lighting technology, additional information is provided upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.