

NORLYS ASKER BIG 1710


AC 220-240V 50-60Hz | IP 44 | IK 08 | LED | DIM

Asker big 1710XX0011
16.09.2026 v.11.12
www.norlys.no



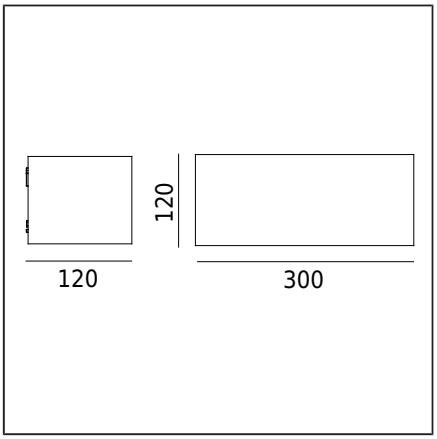

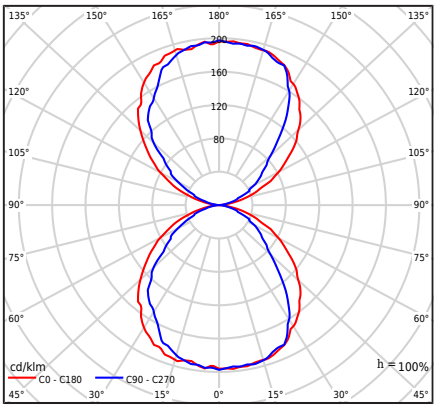

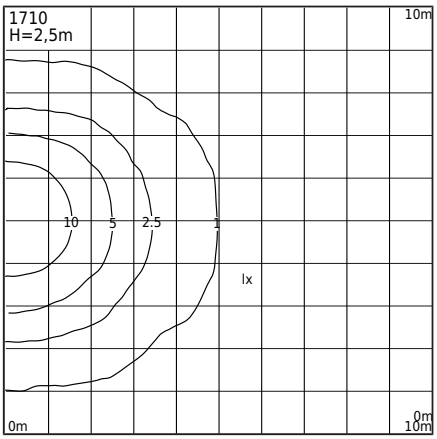

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	A fixture with a wide range of applications, for illuminating wall surfaces and facades, as well as other architectural concepts.

General information

Materials	Front - hot-dip galvanized steel. Body - powder painted aluminum cast Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: intermediate plate with 2 adjustment holes 5x10mm with 45mm spacing, directly with 2 holes ø5mm, 68mm spacing.
Terminal	Connection terminals: max 3x2.5mm², possibility to connect the fixture in a loop max 3x1.5mm². Cable in a round sheath with a diameter of ø7...10.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	2,62kg / 2,98kg
Box dimensions [cm]	34,5cm x 15cm x 17cm

Technical data

2 LED modules	Philips Fortimo Strip 0,5ft MF FC LV6 3K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	6,6W
Luminaire wattage	7,1W
Lamp luminous flux	1128lm
Luminaire luminous flux	649lm
Efficiency of the luminaire	91,4lm/W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤0.3
Strobe effect (SVM)	≤0.7
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF > 0,9
THD factor	20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light sources of energy efficiency class D / EPREL	
Inrush current	1,65A/16,5µs]
BUG rating	B0-U3-G0

Maximum number of luminaires of this type per MCB:

B 10A: 157

Spare parts

ZS1710zx0011	Service set.

Files to download

Photometric LDT files	Photometric IES files
BIM Revit	BIM ArchiCAD

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, you should familiarize yourself with the instructions attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided upon customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of fixture quality.

ASKER BIG 1710



Indexes

Index	Color	RAL
1710GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System
ISO 9001:2015
IATF 16949:2016
www.tuv.com
ID 9108651873

PCC Cert
CERTIFICATE
ISO 14001

RoHS 2011/65/UE

Before starting the assembly, you should familiarize yourself with the instructions attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided upon customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of fixture quality.