


NORLYS ASKER BIG 1715

Asker big 1715XX0011
16.09.2026 v.11.9
www.norlys.no



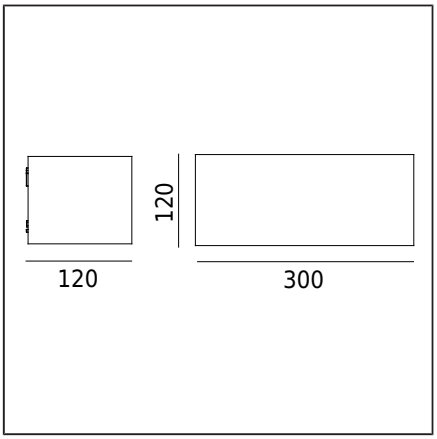

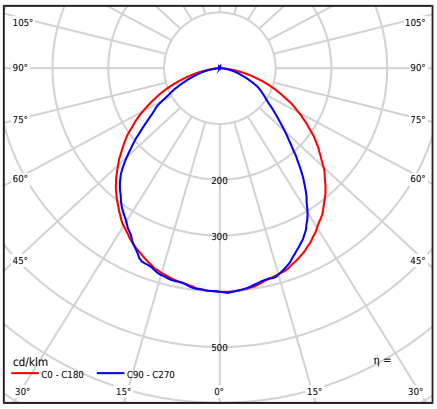

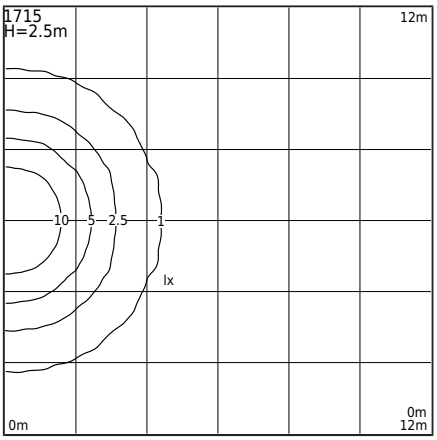

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	A fixture with a wide range of applications, for illuminating wall surfaces and facades as well as other architectural concepts.

General information

Materials	Front - hot-dip galvanized steel. Body - powder painted aluminum cast Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: intermediate plate with 2 adjustable holes 5x10mm, spacing 45mm, direct 2 holes ø5mm, spacing 68mm.
Terminal	Connection terminals: max 3x2.5mm², possibility of connecting the fixture in a loop max 3x1.5mm². Cable in a round sheath with a diameter of ø7...10.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Box dimensions [cm]	34,5cm x 15cm x 17cm

Technical data

LED module	Philips Fortimo_LED_Strip_0.5ft_MF_8xx_HV6 3K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	4W
Luminaire wattage	5,3W
Lamp luminous flux	653lm
Luminaire luminous flux	347lm
Efficiency of the luminaire	65,5lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
Power Factor luminaire	PF > 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class C / EPREL	
BUG rating	B0-U0-G0

Spare parts

ZS1715zx0011	LED module.

Files to download

Photometric LDT files	Photometric IES files
BIM Revit	BIM ArchiCAD

Indexes

Index	Color	RAL
1715GA	HOT-DIP GALVANIZING	-

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before beginning installation, please refer to the instructions included with the fixture. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation, which may occur within fixtures, is a natural phenomenon and does not affect the quality of the fixture.