


NORLYS ASKER SMALL PRO 1720


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

Asker small pro
1720XX0010
04.11.2026 v.10.18
www.norlys.no

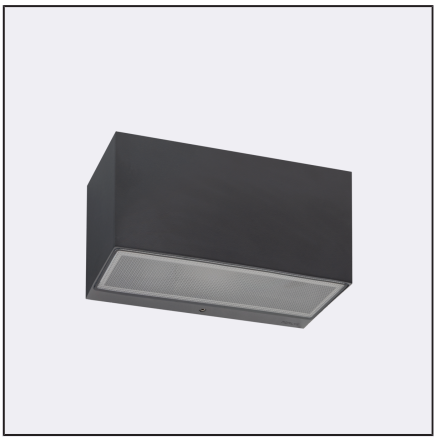

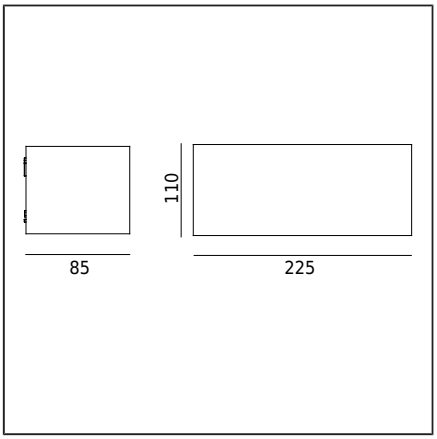

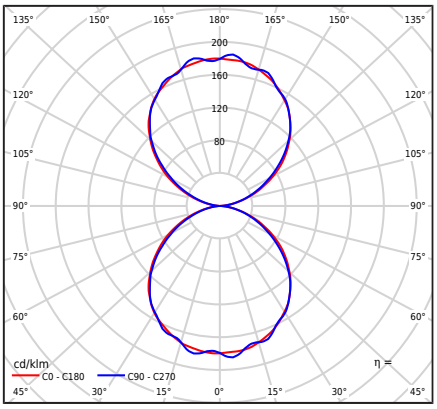

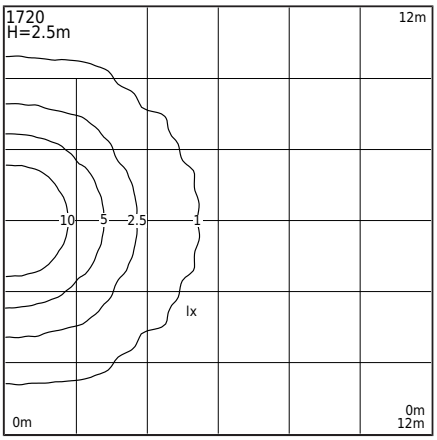

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	A fixture with a wide range of applications, including lighting wall surfaces, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 2 holes ø4.5mm spacing 180x60mm
Terminal	Terminal clamps: max 3x2.5mm², possibility to loop the fixture: max 3x1.5mm². Cable in circular sheath with diameter ø7...10.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	1,34kg / 1,47kg
Box dimensions [cm]	24,5cm x 12,5cm x 10,5cm

Technical data

2 LED modules	Philips Fortimo Strip 0,5ft MF FC LV6 3K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Light source wattage	6,6W
Luminaire wattage	8,4W
Lamp luminous flux	1128lm
Luminaire luminous flux	798lm
Efficiency of the luminaire	95lm/W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤0.3
Strobe effect (SVM)	≤0.7
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF > 0,9
THD factor	20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light sources of energy efficiency class D / EPREL	
Inrush current	1,65A/16,5µs]
BUG rating	B0-U3-G0

Maximum number of luminaires of this type per MCB:

B 10A: 157

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please read the instructions included with the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request.

ASKER SMALL PRO 1720

Indexes

Index	Color	RAL
1720AL	ALUMINUM	9006
1720BL	BLACK	9005
1720GR	GRAPHITE	7016
1720WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the assembly, please read the instructions included with the fixture. Due to the dynamic development of lighting technology, we provide additional information at the customer's request.