


NORLYS ASKER SMALL PRO 1726


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

Asker small pro
1726XX0017
13.10.2026 v.17.2
www.norlys.no

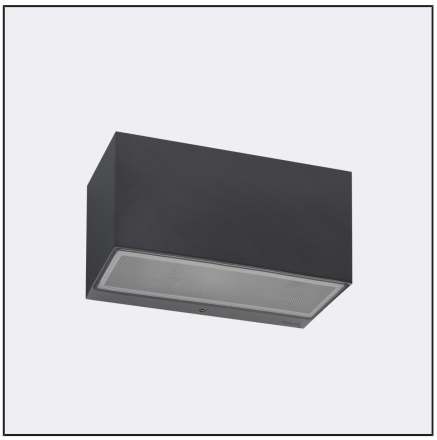

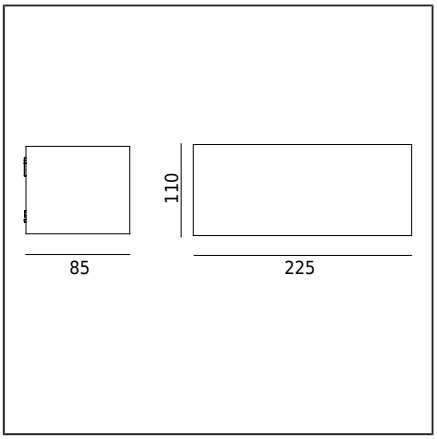

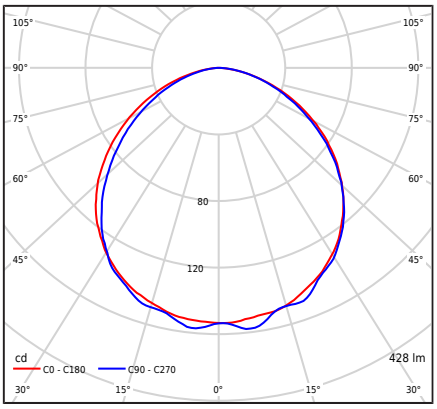

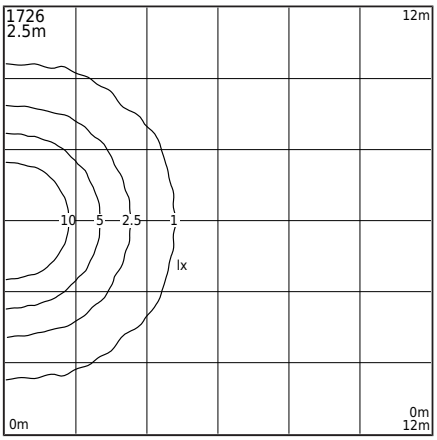

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffuse downward-directed hemispherical light
Characteristics of the luminaire	A luminaire with a wide range of applications, including wall surface lighting, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 2 holes ø4.5mm spacing 180x60mm
Terminal	Connection terminals: max 3x2.5mm², possibility of connecting the luminaire in a loop max 3x1.5mm². Round cable with a diameter of ø7...10.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	1,34kg / 1,47kg
Box dimensions [cm]	24,5cm x 12,5cm x 10,5cm

Technical data

LED module	Philips Fortimo_LED_Strip_0.5ft_MF_8xx_HV6 3K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	3,9W
Luminaire wattage	5,4W
Lamp luminous flux	653lm
Luminaire luminous flux	429lm
Efficiency of the luminaire	79,4lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF > 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class C / EPREL	
BUG rating	B0-U0-G0

Spare parts

ZS1726zx0010	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1726AL	ALUMINUM	9006
1726BL	BLACK	9005
1726GR	GRAPHITE	7016
1726WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please read the instructions attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation, which may occur in fixtures, is a natural phenomenon and does not affect the quality of the fixture.