
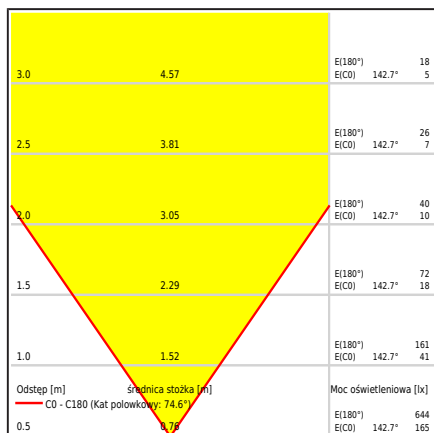
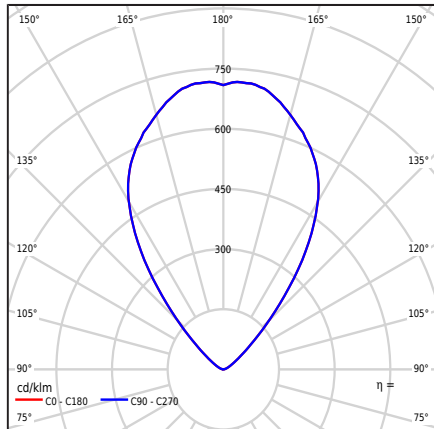


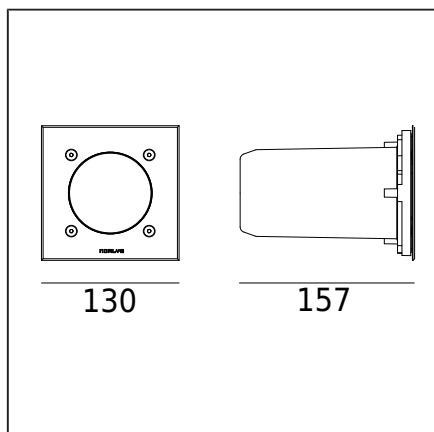

Type of luminaire

Type of luminaire	In-ground luminaire.
Photometric body	Diffused light.
Characteristics of the luminaire	A temporary or as-needed tire, which can be used for vehicles with pneumatic tires. These tires should not be used on wheel tracks, where they would be subject to horizontal loads due to sudden braking, acceleration, and changes in direction.

General information

Materials	Powder painted aluminum cast. Front - stainless steel. Lens - safety glass, satin. Silicone gasket. Nickel plated brass cable gland.
Mounting method	Luminaire mounting: 3 holes $\varnothing 4.5\text{mm}$, diameter $\varnothing 100\text{mm}$ every 120° to the attached box set in accordance with the attached instructions or a properly prepared hole in the wood (see assembly instructions). Other accessories must be purchased separately
Terminal	The luminaire is equipped with a cable type 05RN8-F 3G1, 3m long To be connected in a properly selected electrical installation box The maximum load on the luminaire is 2000 kg Note: on the glass surface at the center point, operating temperatures are reached in accordance with standard 60598 (ambient temperature 15°C)
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Net / gross weight of luminaire	1,02kg / 1,22kg
Box dimensions [cm]	16,5cm x 16,5cm x 21,5cm
Luminaire dimensions [cm]	13cm x 13cm x 15,7cm

Technical data

External control	Phase dimmer Lumens LEDAC (User manual)
Luminaire wattage	4,1W
Luminaire luminous flux	219lm
Efficiency of the luminaire	53,4lm/W
ULOR	100%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Rated life time L70/B50 at 25°C	50 000h
Power Factor luminaire	PF 0,99
THD factor	20%
Ta Rated temperature	$+25^\circ\text{C}$
Ambient temperature	TA MAX= $+65^\circ\text{C}$

This product contains light source of energy efficiency class **E** / **EPREL**

Optionally, the luminaire is also available:
- For LED color 2700K; 5000K; 5700K [I/I]
- For a different color of the luminaire (according to the RAL color palette)
Terms of sale and other information, after contact with the Norlys Sales Department

Inrush current	17mA / 60ms
BUG rating	B0-U3-G0

Accessories sold separately

143ZX0009	Cable shield
145ZX0009	Connection box
146ZX0009	Connection box

Spare parts

ZS1753zx0009	Service set.
--------------	--------------

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM ArchiCAD



Indexes

Index	Color	RAL
1753ST	STAINLESS STEEL	-

