

NORLYS KOSTER PRO 1819


AC 220-240V 50-60Hz | IP 65 | IK 10 | LED | DALI2

Koster pro
1819XX0010
06.11.2026 v.10.4
www.norlys.no



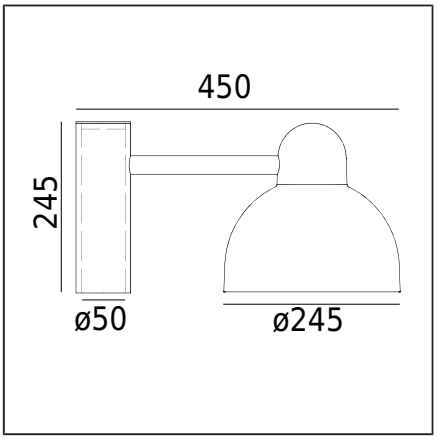

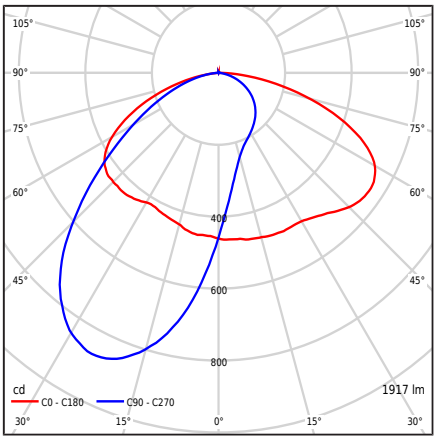

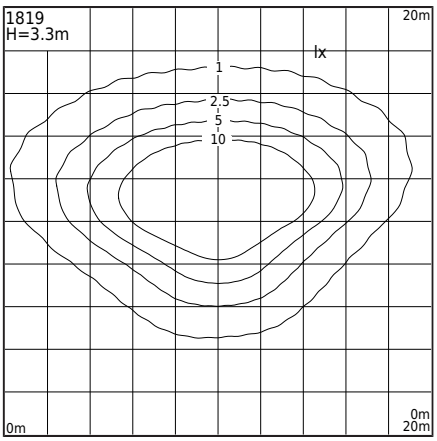

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	T2-M lens by Ledil company.
Characteristics of the luminaire	Straight-arm mounted luminaire, designed for installation on a lighting pole with a mounting shank Ø50mm. Wide, uniform light distribution.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized.
Mounting method	Fixture mounting: fixture adapted for ø60mm pole, depth 80mm. Other accessories should be ordered separately.
Terminal	Cable H05VV-F 5G1 with a length of 3.7m for connection inside a lighting pole (in a suitably selected electrical installation box).
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	System light control: DALI outdoor full programm. The power supply is programmed for the maximum permitted current. Programming of other parameters after contact with the Norlys Sales Department.
Luminaire weight net / gross	2,86kg / 3,74kg
Box dimensions [cm]	43,5cm x 29cm x 24cm
Luminaire dimensions [cm]	45cm x 24,5cm x 24,5cm
Side area of luminaire	0,045m^2

Technical data

LED module	Philips Fortimo FastFlex LED 2x4 G5 3K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 / NightDim (XI FP NLD) (User manual)
Light source wattage	15,4W
Luminaire wattage	16,9W
Lamp luminous flux	2801lm
Luminaire luminous flux	1917lm
Efficiency of the luminaire	113,4lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM5
Flicker of light (Pst LM)	≤0.1
Strobe effect (SVM)	≤0.1
Colour rendering index CRI	70
L90B10 [wg LM-80]	>100 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF>0.98
THD factor	7%
Overvoltage	6 / 10kV
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class D / EPREL

Optionally, the fixture is also available:
- for LED color 2200K/2700K
- for a different luminous flux value
- for a different fixture color (in accordance with the RAL color palette)

Terms of sale and additional information are available upon agreement with Norlys Sales Department.
Luminaire sur bras droit en saillie, destiné à être monté sur un poteau d'éclairage avec un manche de montage Ø50mm.
Large répartition uniforme de la lumière.

Inrush current	15A / 295µsec
BUG rating	B1-U1-G1

Maximum number of luminaires of this type per MCB:

B 10A: 18, B 16A: 29, C 10A: 30, C 16A: 49

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please refer to the instructions included with the fixture. Due to the dynamic development of lighting technology, additional information is available upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

KOSTER PRO 1819

Accessories sold separately

1270XX0010	Telescopic pole
1273XX0009	Telescopic pole
3011XX0010	Telescopic pole
7660XX0009	Reduction

Spare parts

911730000	Electrical service kit.
ZS1819zx0010	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
1819AL	ALUMINUM	9006
1819GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the installation, please refer to the instructions included with the fixture. Due to the dynamic development of lighting technology, additional information is available upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.