

NORLYS GENEVE 1874


AC 220-240V 50-60Hz | IP 65 | IK 08 | E27

Geneve 1874XX0009
16.09.2026 v.09.3
www.norlys.no



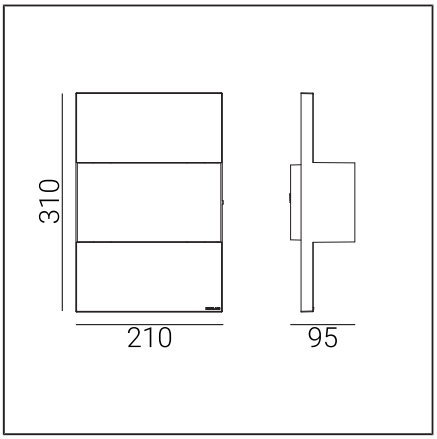

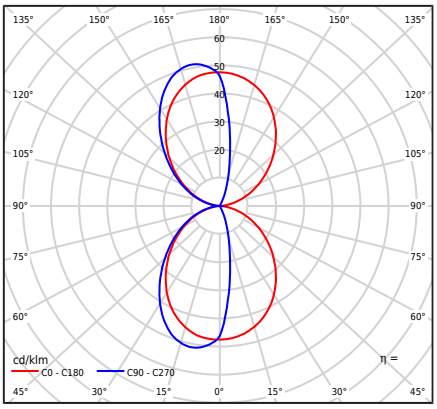

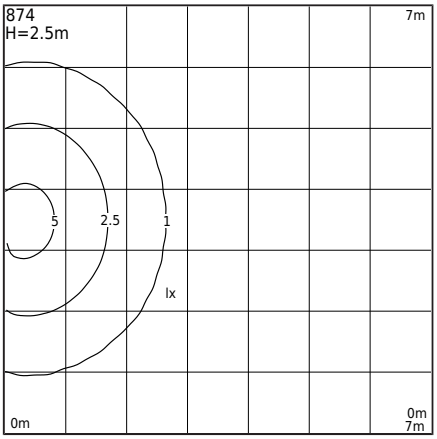

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	A luminaire with a wide range of applications, including lighting: wall surfaces, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. EPDM cable gland.
Mounting method	Mounting of the luminaire: 2 holes ø5mm at a distance of 100x132mm
Terminal	Connection terminals: max 3x2.5mm² Possibility of connecting the luminaire in loops of max. 3x1.5mm² Round insulated cable with a maximum diameter from ø7...10,5mm
Type of light source	Lamp E27 A55...A60 Replaceable light source by an end-user.
Luminaire weight net / gross	1,47kg / 1,85kg
Box dimensions [cm]	23cm x 13cm x 35,5cm
Luminaire dimensions [cm]	31cm x 21cm x 95cm

Technical data

Lamp E27	LED A55...67
Light source wattage	LED max 9W
Luminaire wattage	LED max 9W
ULOR	50%
Ambient operating temp. range	-20...+45°C
BUG rating	B0-U3-G0

Spare parts

06870010	Lampshade - service kit

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1874AL	ALUMINUM	9006
1874GR	GRAPHITE	7016
1874WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.