

NORLYS GENEVE 1879


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

Geneve 1879XX0010
14.10.2026 v.10.6
www.norlys.no



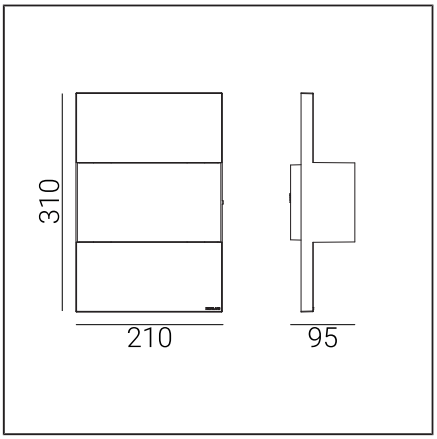

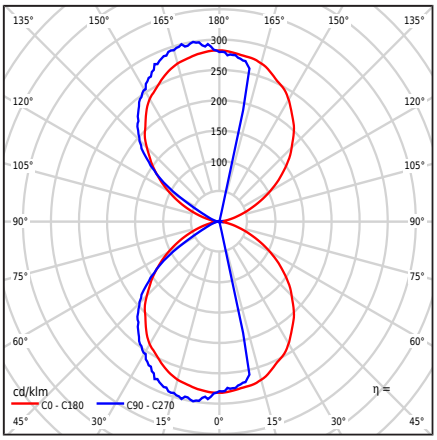

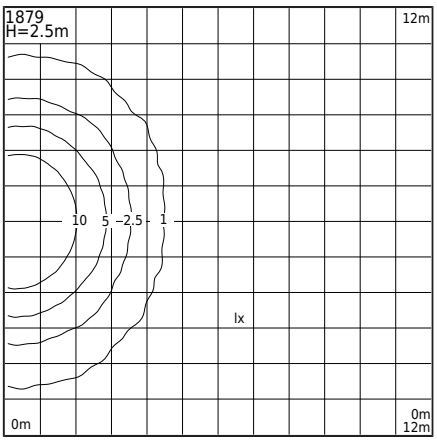

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	A luminaire with a wide range of applications, including for lighting: wall surfaces and facades, and other architectural concepts

General information

Materials	Powder painted aluminum cast. Lens - satin polycarbonate, UV stabilized . Silicone gasket. EPDM cable gland.
Mounting method	Mounting of the luminaire: 2 holes ø5mm, space 100x132mm. According to the attached installation instructions.
Terminal	Connection terminals: max 3x2.5mm² Possibility of connecting the luminaire in loops of max. 3x1.5mm² Round insulated cable with a diameter of ø7...10.5mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	1,59kg / 1,96kg
Box dimensions [cm]	23cm x 13cm x 35,5cm
Luminaire dimensions [cm]	21cm x 9,5cm x 31cm

Technical data

LED module	Cree DK200305 V3 JB2835 3V 3K R03 (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	6,4W
Luminaire wattage	8,2W
Lamp luminous flux	1218lm
Luminaire luminous flux	649lm
Efficiency of the luminaire	79,1lm/W
ULOR	50%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,92
THD factor	15%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- For a different luminous flux value
- In a different luminaire color (according to the RAL color palette)
Terms of sale and additional information after contact with the Norlys Sales Department.

Inrush current	8A / 10µs
BUG rating	B0-U3-G0

Maximum number of luminaires of this type per MCB:

B 10A: 46, B 16A: 75, C 10A: 74, C 16A: 120

Spare parts

4699100540	Service set power supply
4699101109	Service set LED
ZS1879zx0010	Repair kit.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, it is necessary to read the instructions included with the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the luminaire.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
1879AL	ALUMINUM	9006
1879GR	GRAPHITE	7016
1879WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, it is necessary to read the instructions included with the luminaire. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the luminaire.