


NORLYS GENEVE 1880

Geneve
1880XX0009
14.10.2026 v.09.3
www.norlys.no



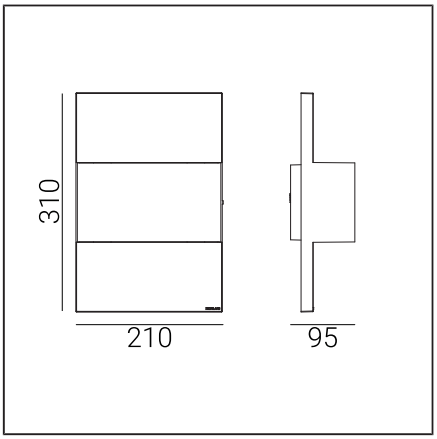

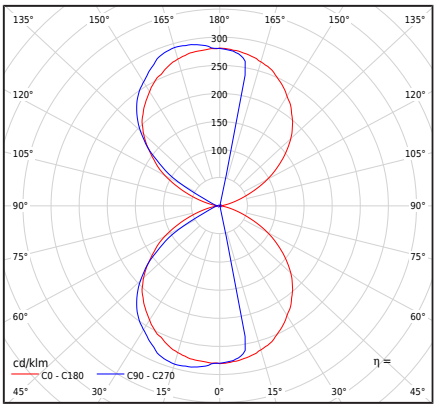

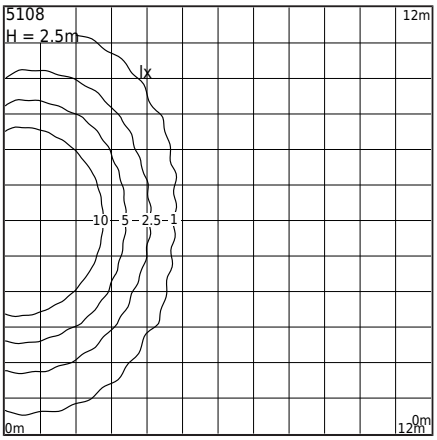

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light: directed up and down.
Characteristics of the luminaire	A luminaire with a wide range of applications, including lighting: wall surfaces, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - satin polycarbonate, UV stabilized . Silicone gasket. EPDM cable gland.
Mounting method	Mounting of the luminaire: 2 holes ø5mm at a distance of 100x132mm
Terminal	Connection terminals: max 3x2.5mm² Possibility of connecting the luminaire in loops of max. 3x1.5mm² Round insulated cable with a maximum diameter from ø7...10,5mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	1,71kg / 2,4kg
Box dimensions [cm]	23cm x 13cm x 35,5cm

Technical data

2 LED modules	Philips Fortimo Strip 0,5ft MF FC LV6 4K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Light source wattage	6,6
Luminaire wattage	8,4
Lamp luminous flux	1196lm
Luminaire luminous flux	656lm
Efficiency of the luminaire	78,1lm/W
ULOR	50%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤0.3
Strobe effect (SVM)	≤0.7
Colour rendering index CRI	80
L80B20 [wg LM-80]	>72 000h
L90B10 [wg LM-80]	>64 000h
Power Factor luminaire	PF 0,90
THD factor	20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class C / EPREL

Optional luminaire also available:
- For a different luminous flux value
- For a different color of the fixture (according to the RAL color palette)
Terms of sale and other information, after contact with the Norlys Sales Department.

Inrush current	1,65A/16,5µs]
BUG rating	B0-U3-G0

Maximum number of luminaires of this type per MCB:

B 10A: 157, B 16A: 254, C 10A: 264, C 16A: 340

Spare parts

ZS5108zx0014	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.

GENEVE 1880



Geneve
1880XX0009
14.10.2026 v.09.3
www.norlys.no

Indexes

Index	Color	RAL
1880AL	ALUMINUM	9006
1880GR	GRAPHITE	7016
1880WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.