


NORLYS MOLDE 1903


AC 220-240V 50-60Hz | IP 54 | IK 07 | LED | DIM

Molde 1903XX0009
16.09.2026 v.09.18
www.norlys.no

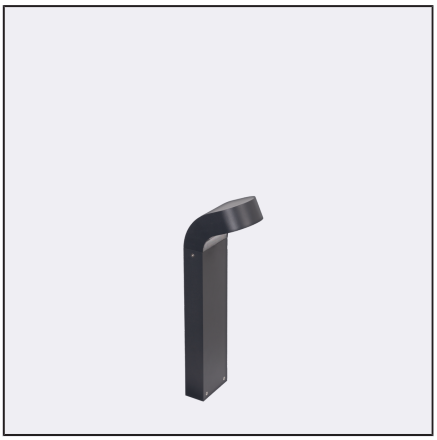

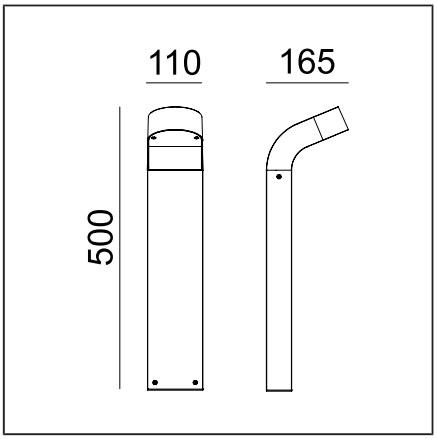

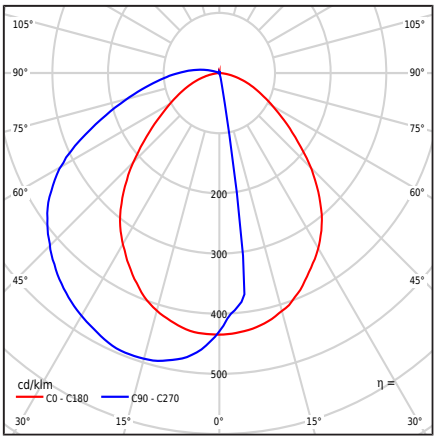

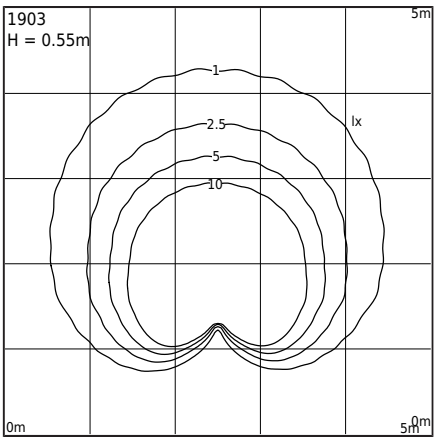

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffused light, covered from the top.
Characteristics of the luminaire	Luminaire with contemporary design. For lighting private areas, parks and other concepts architectural

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized.
Mounting method	Mounting of the luminaire: 4 holes ø7mm, spacing 18x50mm Other accessories must be purchased separately
Terminal	Connection terminals: max 3x2,5mm² Possibility to connect the luminaire in loops, max 3x1,5mm² Round insulated cable with a maximum diameter of ø6....10,5mm
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	1,48kg / 1,8kg
Box dimensions [cm]	51cm x 17cm x 12cm
Luminaire dimensions [cm]	50cm x 16,5cm x 11cm

Technical data

LED module	Lumens EDC 57C 8W xxx 230V F201 3K (Datasheet)
External control	Phase dimmer Lumens LED AC (User manual)
Light source wattage	8W
Luminaire wattage	8W
Lamp luminous flux	743lm
Luminaire luminous flux	386lm
Efficiency of the luminaire	48,3lm/W
ULOR	2%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>55 000h
Power Factor luminaire	PF 0,95
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class F / EPREL

Optionally, the luminaire is also available:
- For the LED color 2700K [1/1]
- For a different color of the fitting (according to the RAL color palette)
- For a different height of the luminaire

Terms of sale and other information after contact with the Sales Department of Norlys

Inrush current	35mA / 60ms
BUG rating	"B0-U1-G0"

Maximum number of luminaires of this type per MCB:

B 10A: 155, B 16A: 250, C 10A: 260, C 16A: 425

Accessories sold separately

1907ZX0009	Concreting anchor
3090GA0009	Mounting adapter
1909GA0010	Adapter for concrete foundation
3081XX0009	Mounting adapter
1906ZX0009	Mounting adapter
1908GA0009	Ground anchor

Spare parts

ZS1903zx0009	Service set.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
1903AL	ALUMINUM	9006
1903GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information at the client's request. Condensation, which may occur in luminaires, is a natural phenomenon and does not deteriorate the quality of the luminaire