

NORLYS KOSTER 1914


AC 220-240V 50-60Hz | IP 54 | IK 10 | LED | No Dim

Koster 1914XX0309
02.11.2026 v.09.13
www.norlys.no



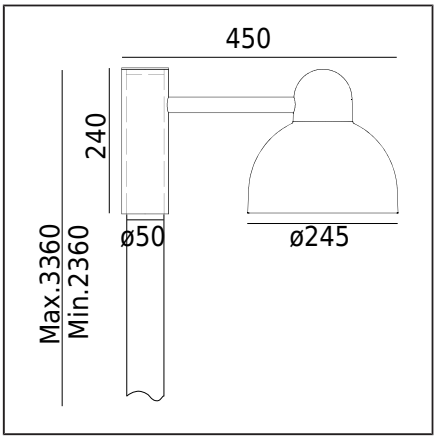

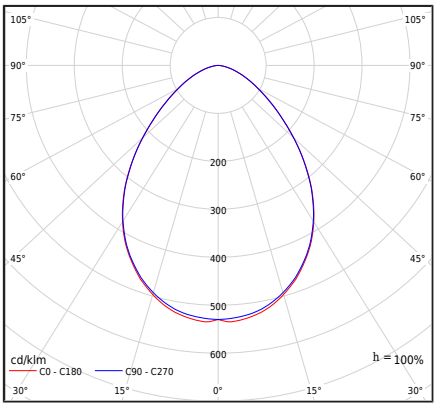

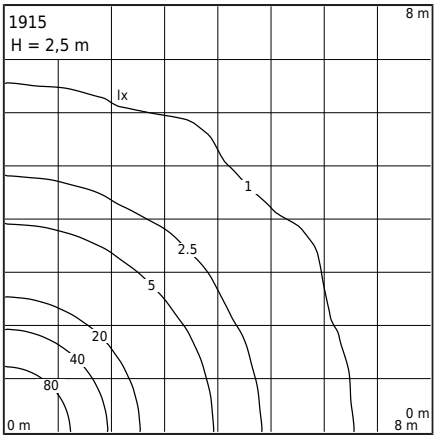

Type of luminaire

Type of luminaire	Pole luminaire.
Photometric body	Single-sided light: symmetrical, directed downward.
Characteristics of the luminaire	A luminaire with a classic design, mounted on a lighting pole, telescopic with adjustable height from 2360 to 3360mm.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized.
Mounting method	Fixture attachment: 3 holes ø10.5mm, on a ø207mm diameter every 120°. Set composition: art. 1915- ø50mm overhead lighting fixture, art. 1273- lighting pole. Other accessories must be ordered separately.
Terminal	Connection terminal: for cable max 3x2.5mm², equipped with 1A 5x20 fuse. Cable with round insulation with a maximum diameter of ø12.5mm.
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Non-dimmable fixture
Luminaire weight net / gross	9,42kg / 11,77kg
Luminaire dimensions [cm]	24,5cm x 45cm x 336cm
Side area of luminaire	0,01m²

Technical data

LED module	Philips Fortimo DLM ES 2000/8xx G2 3K (Datasheet)
Light source wattage	17,5W
Luminaire wattage	17,5W
Lamp luminous flux	1950lm
Luminaire luminous flux	1568lm
Efficiency of the luminaire	89,6lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>50 000h
Power Factor luminaire	PF > 0,9
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class E / EPREL	
Inrush current	3,01A/32,66µs
BUG rating	B1-U1-G1

Maximum number of luminaires of this type per MCB:

B 10A: 62, B 16A: 100, C 10A: 104, C 16A: 170

Accessories sold separately

405ZX0009	Concreting anchor
3089GA0009	Mounting adapter

Spare parts

06710000	Lampshade - service kit
46999751	LED module.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, it is necessary to familiarize oneself with the instructions attached to the luminaire. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the deterioration of the luminaire's quality.

Indexes

Index	Color	RAL
1914AL	ALUMINUM	9006
1914GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Before starting the installation, it is necessary to familiarize oneself with the instructions attached to the luminaire. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the deterioration of the luminaire's quality.