

NORLYS VOSS 1950


IP 54 | IK 06 | AC 220-240V 50-60Hz | LED | DIM

Voss 1950XX0B12
16.09.2026 v.12.9
www.norlys.no



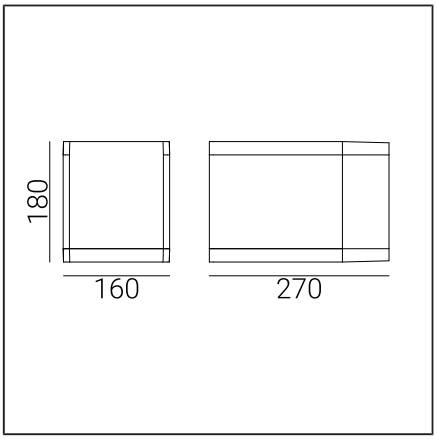

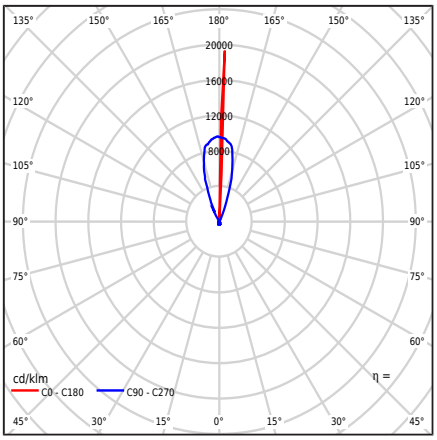

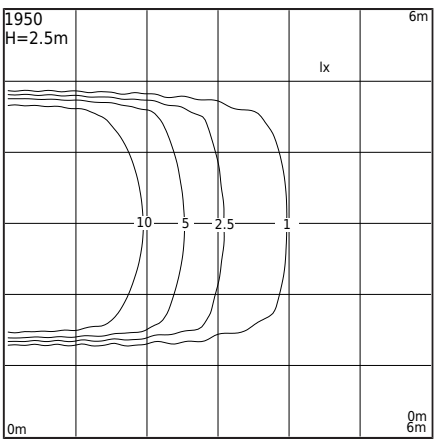

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light with 4° beam angle up and 62° beam angle down.
Characteristics of the luminaire	A luminaire with a wide range of applications, including lighting wall surfaces and facades, as well as other architectural concepts

General information

Materials	Powder painted aluminum cast. Lampshade - safety glass, transparent. Silicone gasket. EPDM cable gland.
Mounting method	Mounting of the luminaire: 2 holes ø7mm, spacing 100x80mm According to the attached assembly instructions
Terminal	Connection terminals: max 3x2.5mm² Possibility of connecting the luminaire with loops of max. 3x1.5mm² Round insulated cable with a diameter of ø7...10.5 mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	4,57kg / 5,03kg
Box dimensions [cm]	22,5cm x 19,5cm x 32cm
Luminaire dimensions [cm]	18cm x 16cm x 27cm

Technical data

3 LED Modules	Cree DK180501 V8 JB2835 3V 3K (Datasheet)
Driver	Yes
Light source wattage	12,5W
Luminaire wattage	15,1W
Lamp luminous flux	2166lm
Luminaire luminous flux	665lm
Efficiency of the luminaire	44lm/W
ULOR	20/80%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
THD factor	10%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class C / EPREL

Optional fixture also available:
- Operating mode/dimming: DALI2
- For LED color 2700K [1/1]
- For a different luminous flux value
- For a different color of the fixture (according to the RAL color palette)

Terms of sale and other information, after contact with the Norlys Sales Department

Inrush current	2A / 50≡s
BUG rating	B1-U1-G0

Spare parts

4699101111	LED module.
4699906520	Power supply.
ZS1950zx0B12	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire

Indexes

Index	Color	RAL
1950AL	ALUMINUM	9006
1950GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire