


NORLYS VOSS 1951

Voss 1951XX0G11
16.09.2026 v.11.14
www.norlys.no



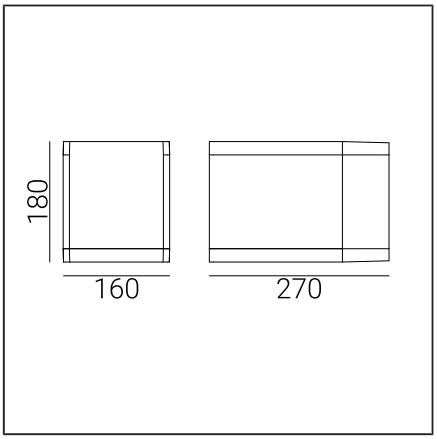

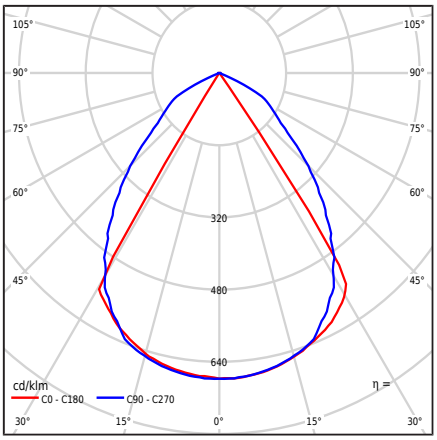

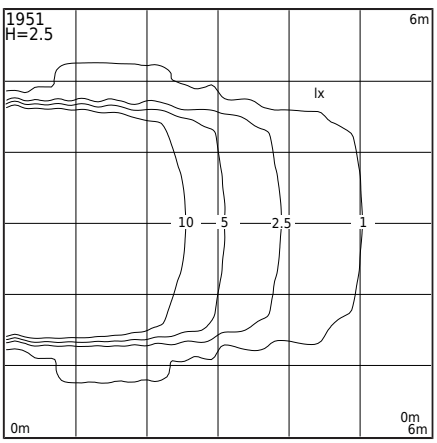

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Single-sided light with 62° beam angle facing down.
Characteristics of the luminaire	A luminaire with a wide range of applications, for lighting: wall and facade surfaces and other architectural concepts

General information

Materials	Powder painted aluminum cast. Lampshade - safety glass, transparent. Silicone gasket. EPDM cable gland.
Mounting method	Mounting of the luminaire : 2 holes ø7mm, spacing 100x80mm According to the attached assembly instructions
Terminal	Connection terminals: max 3x2.5mm² Possibility of connecting the luminaire in loops of max. 3x1.5mm² Round insulated cable with a diameter of ø7...10.5mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	4,56kg / 5,04kg
Box dimensions [cm]	22,5cm x 19,5cm x 32cm
Luminaire dimensions [cm]	18cm x 16cm x 27cm

Technical data

2 LED modules	Cree DK180501 V8 JB2835 3V 3K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Light source wattage	8,3W
Luminaire wattage	10W
Lamp luminous flux	1444lm
Luminaire luminous flux	599lm
Efficiency of the luminaire	59,9lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,90
THD factor	20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light sources of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- For DC voltage of about 180 ÷ 270 V
- Operating mode/dimming: phase dimming; DALI
- For LED color 2700K
- For a different color of the luminaire (according to the RAL color palette)

Terms of sale and other information, after contact with the Norlys Sales Department

Inrush current	3,36A/36µs
BUG rating	B1-U1-G0

Spare parts

ZS1951zx0G11	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request.
Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire

Indexes

Index	Color	RAL
1951AL	ALUMINUM	9006
1951GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request.
Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire