


# NORLYS MOLDE 1971

AC 220-240V 50-60Hz | IP 54 | IK 07 | LED | No Dim

Molde 1971XX0009
02.11.2026 v.09.20
www.norlys.no

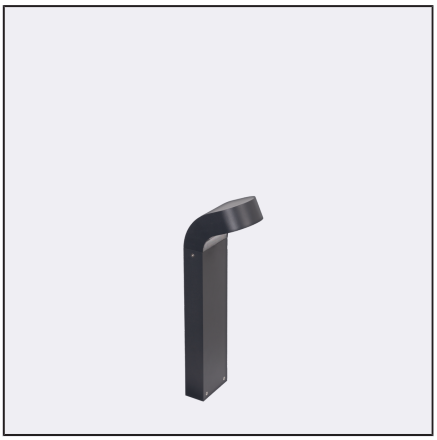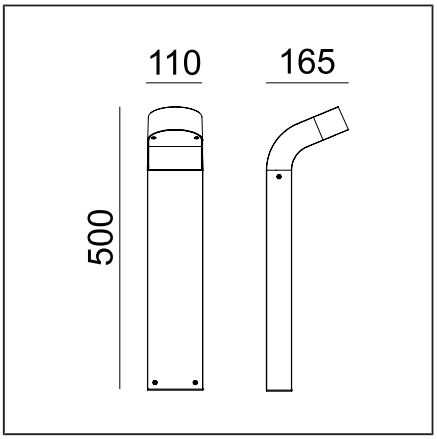

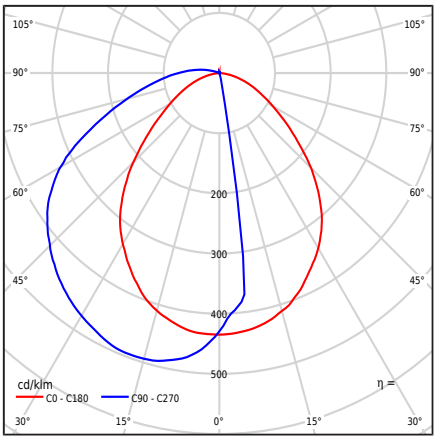


## Type of luminaire

| | |
|---|---|
| Type of luminaire | Post light fixture. |
| Photometric body | Diffused light, covered from the top. |
| Characteristics of the luminaire | Luminaire with a contemporary design<br>For lighting private areas, parks and other architectural concepts |

## General information

| | |
|---|---|
| Materials | Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. |
| Mounting method | Fixture mounting: 4 holes ø7mm, spacing 18x50mm.<br>According to the attached installation instructions.<br>Other accessories need to be purchased separately. |
| Terminal | Connection terminals: max 4x4mm²,<br>possibility for looping the fixture max 4x2.5mm².<br>Round cable with diameter: ø4...8mm, ø8...12mm, or ø10...13.6mm. |
| Type of light source | AC integrated LED module, PIR motion detector<br>Replaceable (LED only) light source by a professional. |
| Light control | Luminaire equipped with a PIR motion sensor, with a dusk switch and motion hold. Programmed for: maximum range of operation, lighting time 1 minute, twilight 10lux. |
| Luminaire weight net / gross | 1,48kg / 1,8kg |
| Box dimensions [cm] | 17cm x 12cm x 51cm |
| Luminaire dimensions [cm] | 16,5cm x 11cm x 50cm |

## Technical data

| | |
|---|---|
| LED module | Lumens EDC 57C 8W xxx 230V F201 3K (Datasheet) |
| External control | ESYLUX PIR Motion Sensor MD-C 360I/6 mini (User manual) |
| Light source wattage | 8W |
| Luminaire wattage | 8,2W |
| Lamp luminous flux | 743lm |
| Luminaire luminous flux | 386lm |
| Efficiency of the luminaire | 47,1lm/W |
| ULOR | 2% |
| Color temperature | 3000K |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Colour rendering index CRI | 80 |
| L70TM-21 [wg LM-80] | >55 000h |
| Power Factor luminaire | PF 0,95 |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |

This product contains light source of energy efficiency class F / EPREL

Optionally, the luminaire is also available:
- For LED color 2700K [1/1]
- For a different color of the luminaire (according to the RAL color palette)
- For a different height of the luminaire (not less than 55cm)

Terms of sale and other information, after contact with the Norlys Sales Department

| | |
|---|---|
| Inrush current | 35mA / 60ms |
| BUG rating | "B0-U1-G0" |

## Accessories sold separately

| | |
|---|---|
| 1907ZX0009 | Concreting anchor |
| 3090GA0009 | Mounting adapter |
| 1909GA0010 | Adapter for concrete foundation |
| 3081XX0009 | Mounting adapter |
| 1906ZX0009 | Mounting adapter |
| 1908GA0009 | Ground anchor |

## Spare parts

| | |
|---|---|
| ZS PIR 0919730001 | Repair kit. |
| ZS1971zx0009 | Repair kit. |

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no


TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request.
Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire

# NORLYS MOLDE 1971






## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| Manual | |

## Indexes

| Index | Color | RAL |
|---|---|---|
| 1971AL | ALUMINUM | 9006 |
| 1971GR | GRAPHITE | 7016 |

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System
ISO 9001:2015
IATF 16949:2016
www.tuv.com
ID 9108651873

PCC Cert
CERTIFICATE
ISO 14001

RoHS 2011/65/UE

Before the assembly, read the instructions attached to the luminaire. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information on request.
Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire