

NORLYS FREJA 1980


AC 220-240V 50-60Hz | IP 44 | E27 LED

FREJA 1980XX0009
12.10.2026 v.09.37
www.norlys.no



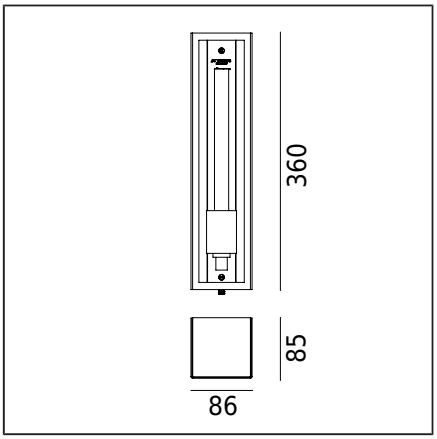

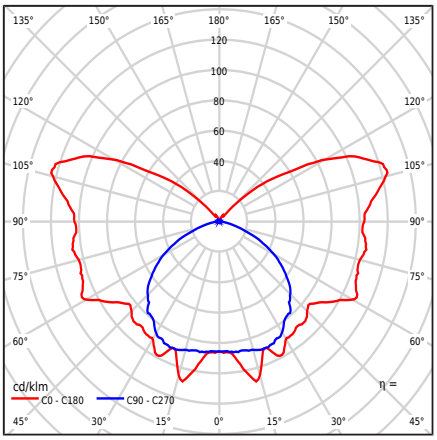

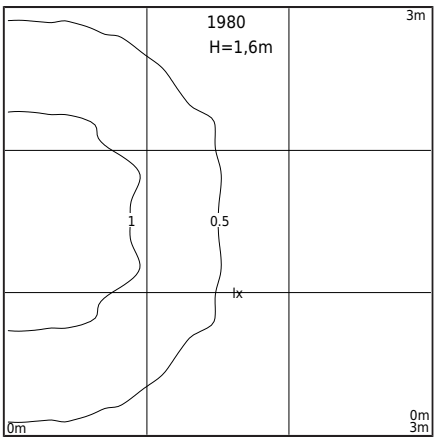

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Light discovered
Characteristics of the luminaire	Fixture with classic and simple design for general use. Excellent for lighting terraces, entrances, gazebos, and other architectural layouts.

General information

Materials	Powder painted steel. Lampshade - safety glass, transparent. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 2 holes ø4.2mm, spacing 42x317mm.
Terminal	Connection terminals: max 3x2.5mm², Round cable with diameter ø7...10.5mm.
Luminaire weight net / gross	2,45kg / 2,65kg
Box dimensions [cm]	12,5cm x 12,5cm x 41cm
Luminaire dimensions [cm]	8,5cm x 8,6cm x 36cm

Technical data

LED Lamp E27	Lampa dekoracyjna Smoky LED dimmable filament bulb E27 T30*225 / 220-240V / 2,2W / 2100K / 50 Lumen
Light source wattage	2,2W
Luminaire wattage	2,5W
Lamp luminous flux	50lm
Luminaire luminous flux	41lm
Efficiency of the luminaire	16,4lm/W
ULOR	31%
Color temperature	2100K
Ta Rated temperature	+25°C

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
1980BL	BLACK	9005
1980WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE