

NORLYS MOLDE 2029


IP 54 | IK 07 | AC 220-240V 50-60Hz | LED | No Dim

Molde 2029XX0009
02.11.2026 v.09.8
www.norlys.no



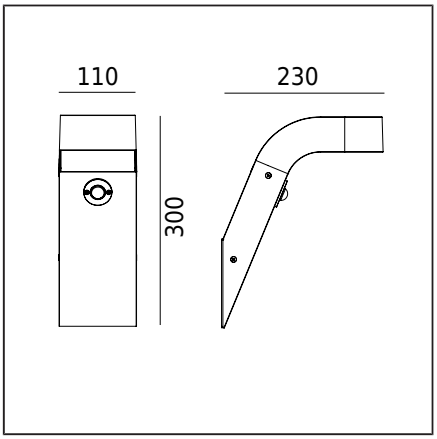

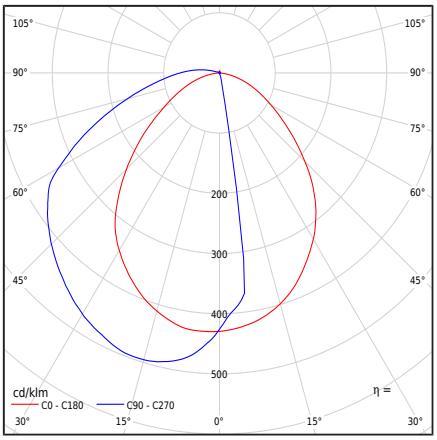

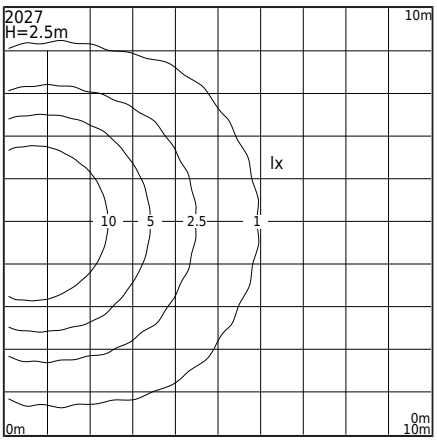

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Diffused light, covered from the top.
Characteristics of the luminaire	A luminaire with a contemporary design. For lighting private areas, parks and other concepts architectural

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized.
Mounting method	Mounting of the lumianire: 2 holes ø6mm, spacing 90mm Other accessories must be purchased separately
Terminal	Connection terminals: max 3x2.5mm² Possibility of connecting the luminaire with loops of max. 3x1.5mm² Round insulated cable with a maximum diameter of ø12,5mm
Type of light source	LED module AC integrated Replaceable (LED only) light source by a professional.
Light control	Luminaire equipped with a PIR motion sensor, with a dusk switch and motion hold. Programmed for: maximum range of operation, lighting time 1 minute, twilight 10lux.
Luminaire weight net / gross	1,15kg / 1,36kg
Box dimensions [cm]	15cm x 12cm x 39cm
Luminaire dimensions [cm]	23cm x 11cm x 30cm

Technical data

LED module	Lumens EDC 57C 8W xxx 230V F201 4K (Datasheet)
External control	ESYLUX PIR Motion Sensor MD-C 360I/6 mini (User manual)
Light source wattage	8W
Luminaire wattage	8W
Lamp luminous flux	772lm
Luminaire luminous flux	438lm
Efficiency of the luminaire	54,8lm/W
ULOR	2%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
Power Factor luminaire	PF0,95
THD factor	30%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class E / EPREL

Optional fixture also available:
- For LED color 2700K [1/1]
- For a different color of the fixture (according to the RAL color palette)
- No other height possible

Terms of sale and other information, after contact with the Norlys Sales Department

Inrush current	35mA / 60ms
BUG rating	"B0-U1-G0"

Spare parts

06190001	Lampshade - service kit
ZS2029zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire

Indexes

Index	Color	RAL
2029AL	ALUMINUM	9006
2029GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before the installation, please read the instructions included with the luminaire. Installation and service work are carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire