
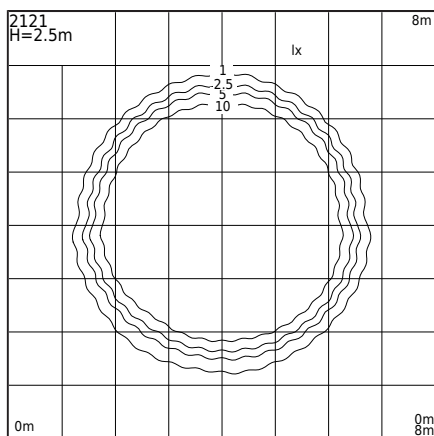
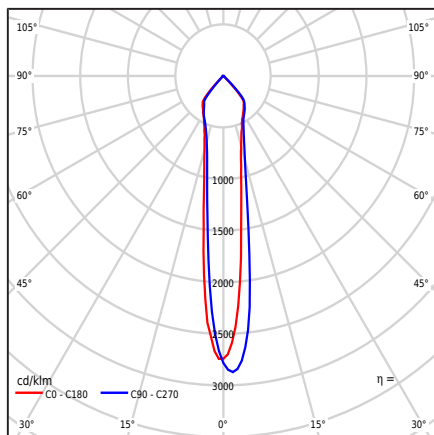


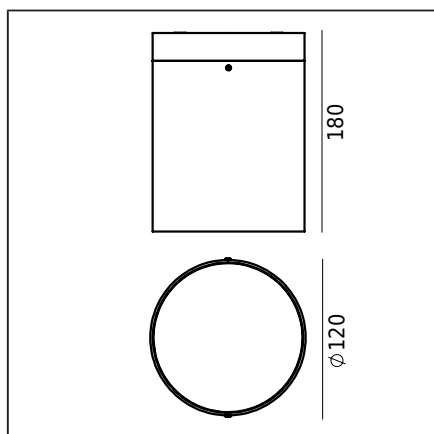

Type of luminaire

Type of luminaire	Ceiling fixture.
Photometric body	Single-sided light with 24° beam angle facing down
Characteristics of the luminaire	A luminaire with a wide range of applications mounted on horizontal surfaces, including lighting: walls, facade surfaces and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lampshade - safety glass, transparent.
Mounting method	Mounting of the luminaire: 2 holes According to the attached instructions.
Terminal	Connection terminals: max 3x2.5mm ² Possibility of connecting the luminaire in loops of max. 1.5mm ² Round insulated cable with a diameter from ø7...10,5mm
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	1,47kg / 1,62kg
Box dimensions [cm]	21cm x 13cm x 13cm
Luminaire dimensions [cm]	18cm x 12cm x 12cm

Technical data

LED module	Philips Fortimo SLM C 1203 L09 1619 G7 3K (ø Datasheet)
Driver	Yes
Driver durability	50000h
External control	Dim. TRIAC (KGP) (User manual)
Light source wattage	6,7W
Luminaire wattage	8,3W
Lamp luminous flux	1051lm
Luminaire luminous flux	754lm
Efficiency of the luminaire	90,8lm/W
ULOR	0%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤0.4
Strobe effect (SVM)	≤0.1
Colour rendering index CRI	80
L80B20 [wg LM-80]	>50 000h
L90B10 [wg LM-80]	>38 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF 0,90
THD factor	15%
Ta Rated temperature	+25°C

This product contains light source of energy efficiency class **A** / **EPREL**

Optional luminaire also available:
- For LED color 2700K [I/I]
- For a different color of the luminaire (according to the RAL color palette)
Terms of sale and other information, after contact with the Norlys Sales Department.

Inrush current	8A / 10µs
BUG rating	B1-U1-G0

Accessories sold separately

3084XX0009 ø	Distance
--------------	----------

Spare parts

ZS2121zx0009	Repair kit.
--------------	-------------

Files to download

Photometric LDT files

Photometric IES files

Manual



Before the installation, please read the instructions included with the luminaire. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in luminaires is a natural phenomenon and does not affect the quality of the luminaire.



Management System
ISO 9001:2015
IATF 16949:2016
www.tuv.com
ID 9108651873



Indexes

Index	Color	RAL
2121AL	ALUMINUM	9006
2121BL	BLACK	9005
2121GR	GRAPHITE	7016
2121WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.