
NORLYS FRIGGA 2148

AC 220-240V 50-60Hz | IP 65 | IK 06 | E27

Frigga 2148XX0009
16.09.2026 v.09.5
www.norlys.no



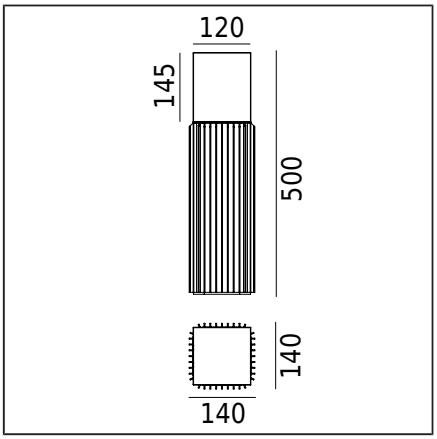

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Light discovered
Characteristics of the luminaire	Fixture with modern design, combining a decorative crystal shade with a durable and stable fixture body.

General information

Materials	Extruded aluminum profile, powder coated. Lens - crystal glass, satin inside. The lampshade may take on an amber color over time.
Mounting method	Fixture mounting: 3 holes ø9mm, on diameter ø65mm every 120°. Other accessories must be purchased separately.
Terminal	Connection terminals: max 2x2.5mm², possibility of looping the fitting max 2x2.5mm². Cable in a round sheath with a maximum diameter of ø12.5mm.
Type of light source	Lamp E27 A55...A60 Replaceable light source by an end-user.
Luminaire weight net / gross	6,5kg / 7,5kg
Box dimensions [cm]	84cm x 17cm x 17cm
Luminaire dimensions [cm]	14cm x 14cm x 50cm

Technical data

Lamp E27	LED A55..60
Light source wattage	LED max 9W
Luminaire wattage	LED max 9W
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

Accessories sold separately

3080GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Spare parts

0921530010	Lampshade - service kit
ZN2148xx0009	Service set.

Files to download

Manual

Indexes

Index	Color	RAL
2148AL	ALUMINUM	9006
2148BL	BLACK	9005
2148CG	CEMENT GREY	7033
2148CB	COPPER BROWN	8004
2148CS	CORTEN STEEL	approx. 8011
2148GR	GRAPHITE	7016
2148GB	GREY BEIGE	7006
2148WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE