

NORLYS FRIGGA 2150


IP 65 | IK 06 | LED | DALI2

Frigga 2150XX0009
16.09.2026 v.09.22
www.norlys.no



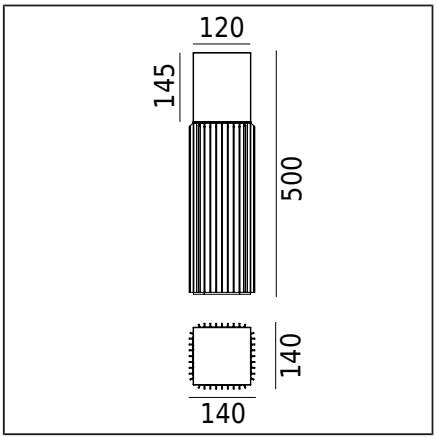

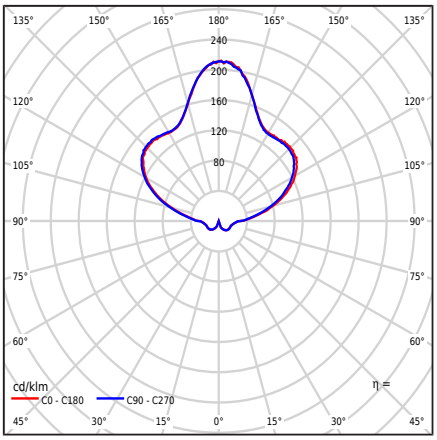

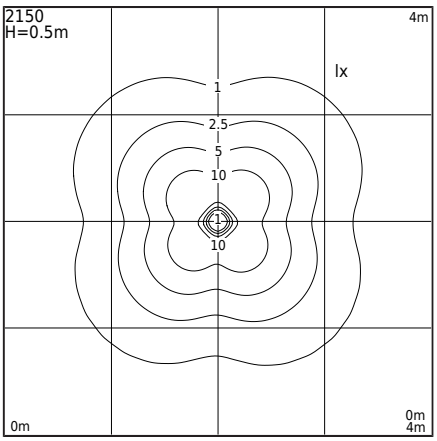

Type of luminaire

Type of luminaire	Bollard.
Photometric body	Light discovered
Characteristics of the luminaire	A fixture with modern design, combining a decorative crystal lampshade with a durable and stable fixture housing.

General information

Materials	Extruded aluminum profile, powder coated. Lens - crystal glass, satin inside. The lampshade may take on an amber color over time. EPDM cable gland.
Mounting method	Mounting of the fixture: 3 holes ø9mm, on a diameter ø65mm at 120° intervals. Other accessories need to be purchased separately.
Terminal	Connection terminals: max 5x2.5mm², possibility to loop the fixture max 5x2.5mm². Cable in a round sheath with a maximum diameter of ø12.5mm.
Type of light source	LED module, DALI electronic power supply Replaceable light source by a professional. Replaceable control gear by a professional.
Light control	Light control - DALI system
Luminaire weight net / gross	6,62kg / 7,67kg
Box dimensions [cm]	84cm x 17cm x 17cm
Luminaire dimensions [cm]	14cm x 14cm x 50cm

Technical data

LED module	Philips Fortimo SLM C 1203 L09 1619 G7 3K (Datasheet)
Driver	Yes
Driver durability	100000h
Light source wattage	4,6W
Luminaire wattage	4,9W
Luminaire luminous flux	322lm
Efficiency of the luminaire	65,7lm/W
ULOR	85%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80B20 [wg LM-80]	>50 000h
L90B10 [wg LM-80]	>38 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF>0.9
Ta Rated temperature	TA +25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class D / EPREL

Inrush current	6.7A/2.4us

Maximum number of luminaires of this type per MCB:

B 10A: 46, B 16A: 74, C 10A: 74, C 16A: 119

Accessories sold separately

3080GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Spare parts

0921530010	Lampshade - service kit
ZN2150xx0009	Service set.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, refer to the manual attached to the fixture. Installation and service work are carried out by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture quality.

FRIGGA 2150

AC 220-240V 50-60Hz | IP 65 | IK 06 | LED | DALI2

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
2150AL	ALUMINUM	9006
2150BL	BLACK	9005
2150CG	CEMENT GREY	7033
2150CB	COPPER BROWN	8004
2150CS	CORTEN STEEL	approx. 8011
2150GR	GRAPHITE	7016
2150GB	GREY BEIGE	7006
2150WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, refer to the manual attached to the fixture. Installation and service work are carried out by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture quality.