

NORLYS FRIGGA 2152


IP 65 | IK 06 | LED | DALI2

Frigga 2152XX0009
16.09.2026 v.09.17
www.norlys.no



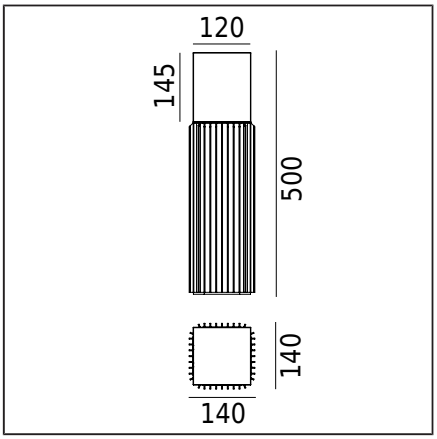

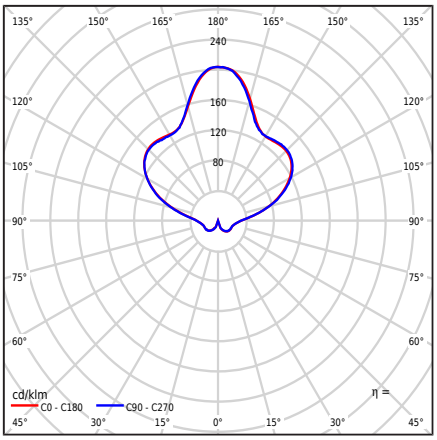

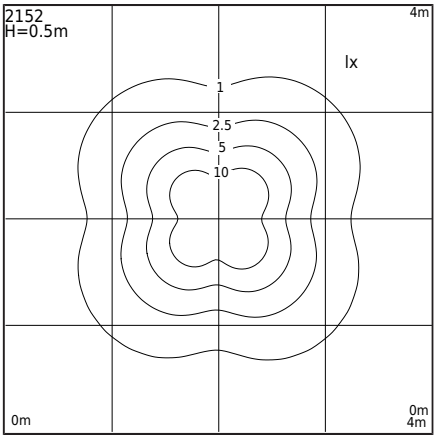

Type of luminaire

Type of luminaire	Bollard.
Photometric body	Light discovered
Characteristics of the luminaire	A luminaire with a modern design, combining a decorative crystal shade with a durable and stable housing.

General information

Materials	Extruded aluminum profile, powder coated. Lens - crystal glass, satin inside. The lampshade may take on an amber color over time. EPDM cable gland.
Mounting method	Mounting the fixture: 3 holes ø9mm, on diameter ø65mm every 120°. Other accessories must be purchased separately.
Terminal	Terminal blocks: max 5x2.5mm², possibility to connect the fixture in a loop max 5x2.5mm². Round silicone cable with a maximum diameter of ø12.5mm.
Type of light source	LED module, DALI electronic power supply Replaceable light source by a professional. Replaceable control gear by a professional.
Light control	Light control - DALI system
Luminaire weight net / gross	6,62kg / 7,67kg
Box dimensions [cm]	84cm x 17cm x 17cm
Luminaire dimensions [cm]	14cm x 14cm x 50cm

Technical data

LED module	Philips Fortimo SLM C 1203 L09 1619 G7 2,7K 929001583806 (Datasheet)
Driver	Yes
Driver durability	100000h
Light source wattage	4,6W
Luminaire wattage	4,8W
Luminaire luminous flux	304lm
Efficiency of the luminaire	63,3lm/W
ULOR	85%
Color temperature	2700K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L70TM-21 [wg LM-80]	>50 000h
LED photobiological threat	RG0 or RG1
Power Factor luminaire	PF=0.9
Ta Rated temperature	TA +35°C
Ambient operating temp. range	-20...+45°C
This product contains light source of energy efficiency class E / EPREL	
Inrush current	6.7A/2.4us

Maximum number of luminaires of this type per MCB:

B 10A: 46, B 16A: 74, C 10A: 74, C 16A: 119

Accessories sold separately

3080GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Spare parts

0921530010	Lampshade - service kit
ZN2152xx0009	Service set.

Files to download

Photometric LDT files | Photometric IES files

Manual

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the installation, read the instructions attached to the fixture. Installation and service works are carried out by a person with appropriate authorizations and qualifications in accordance with applicable regulations. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture quality.

FRIGGA 2152



Indexes

Index	Color	RAL
2152AL	ALUMINUM	9006
2152BL	BLACK	9005
2152CG	CEMENT GREY	7033
2152CB	COPPER BROWN	8004
2152CS	CORTEN STEEL	approx. 8011
2152GR	GRAPHITE	7016
2152GB	GREY BEIGE	7006
2152WH	WHITE	9003

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the installation, read the instructions attached to the fixture. Installation and service works are carried out by a person with appropriate authorizations and qualifications in accordance with applicable regulations. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of the fixture quality.