

NORLYS LILLEHAMMER 2265


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DALI2

Lillehammer
2265XX0009
14.10.2026 v.09.8
www.norlys.no



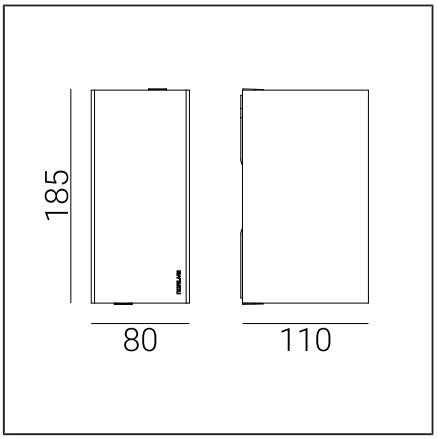

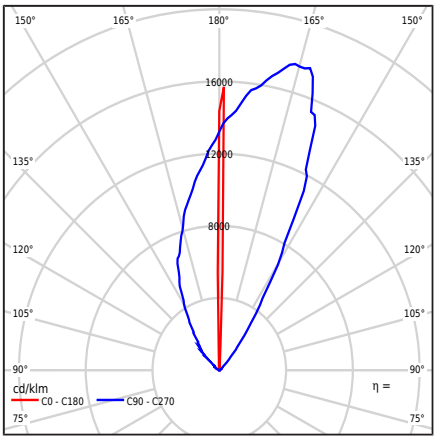

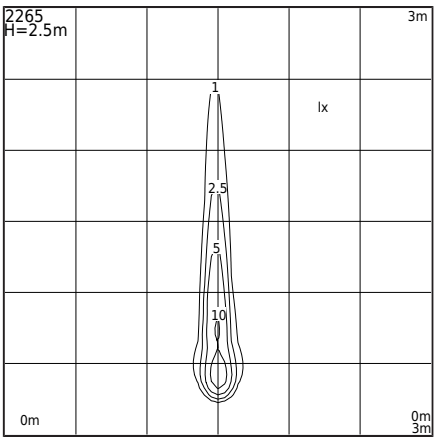

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Single-sided light with 4° beam angle facing up.
Characteristics of the luminaire	A fixture with a wide range of applications including lighting: wall surfaces, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - safety glass, transparent. Silicone gasket. EPDM cable gland.
Mounting method	Mounting of the fixture: 2 holes ø5mm spaced 45x130mm. According to the included assembly instructions.
Terminal	Connecting terminals: max 5x1.5mm², possibility to connect the fixture in a loop max 5x1.5mm². Cable in a round sheath with a diameter in the range ø7...10.5 mm.
Type of light source	LED module, DALI / TD electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control - DALI system
Luminaire weight net / gross	1,6kg / 1,75kg
Box dimensions [cm]	21cm x 12,5cm x 10,5cm
Luminaire dimensions [cm]	18,5cm x 11cm x 8cm

Technical data

LED module	Cree DK180501 V8 JB2835 3V 2,7K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	2,8W
Luminaire wattage	4,5W
Lamp luminous flux	504lm
Luminaire luminous flux	131m
Efficiency of the luminaire	2,9lm/W
ULOR	100%
Color temperature	2700K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L90 TM-21 [wg LM-80]	>h
Power Factor luminaire	≥0.88
THD factor	13%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class D / EPREL

Optionally, the fixture is also available:
- for a different fixture color (according to the RAL color palette)
Terms of sale and other information, after consultation with the Sales Department of Norlys.

Inrush current	6,7A / 2,4µs
BUG rating	B0-U2-G0

Maximum number of luminaires of this type per MCB:

B 10A: 46, B 16A: 74, C 10A: 74, C 16A: 119

Spare parts

ZS2265zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, it is necessary to read the instructions attached to the fixture.
Installation and maintenance work is carried out by a person with the appropriate authorizations and qualifications, in accordance with the applicable regulations.
Due to the dynamic development of lighting technology, additional information is provided upon customer request.
Condensation, which may occur in fixtures, is a natural phenomenon and does not affect the quality of the fixture.

LILLEHAMMER 2265



Indexes

Index	Color	RAL
2265AL	ALUMINUM	9006
2265BL	BLACK	9005
2265GR	GRAPHITE	7016
2265WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the installation, it is necessary to read the instructions attached to the fixture.
Installation and maintenance work is carried out by a person with the appropriate authorizations and qualifications, in accordance with the applicable regulations.
Due to the dynamic development of lighting technology, additional information is provided upon customer request.
Condensation, which may occur in fixtures, is a natural phenomenon and does not affect the quality of the fixture.