

NORLYS LILLEHAMMER 2270


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DALI2

Lillehammer
2270XX0009
14.10.2026 v.09.9
www.norlys.no



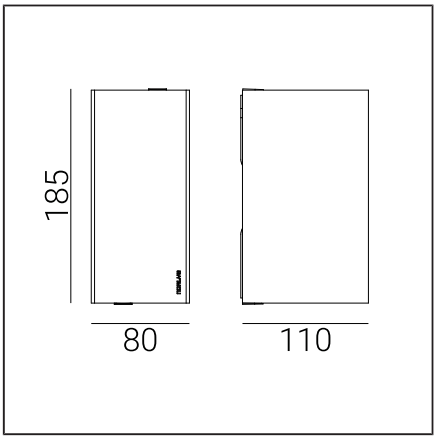

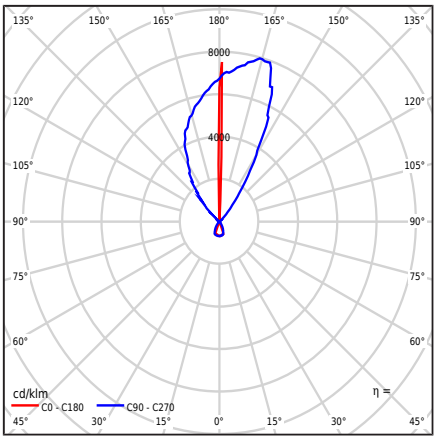

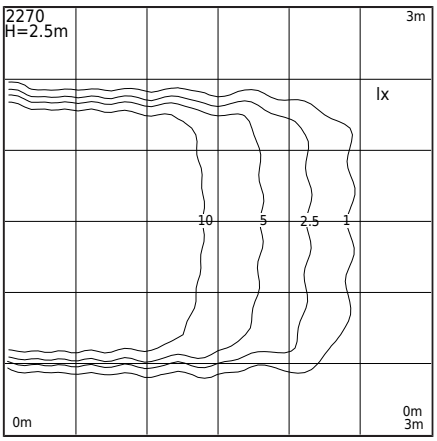

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light with 4° beam angle up and 60° beam angle down and inversely.
Characteristics of the luminaire	A fixture with a wide range of applications, including lighting: wall surfaces, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - safety glass, transparent. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 2 holes ø5mm spacing 45x130mm. In accordance with the attached installation instructions.
Terminal	Connecting terminals: max 5x1.5mm², possibility to connect the fixture in a loop max 5x1.5mm². Cable in a round sheath with a diameter in the range of ø7...10.5 mm.
Type of light source	LED module, DALI / TD electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control - DALI system
Luminaire weight net / gross	1,6kg / 1,75kg
Box dimensions [cm]	21cm x 12,5cm x 10,5cm
Luminaire dimensions [cm]	18,5cm x 11cm x 8cm

Technical data

LED module	Cree DK180501 V8 JB2835 3V 3K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	5,6W
Luminaire wattage	7,3W
Lamp luminous flux	1008lm
Luminaire luminous flux	127lm
Efficiency of the luminaire	17,4lm/W
ULOR	20/80%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	≥0.88
THD factor	13%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the fixture is also available:
- in a different color of the fixture (according to the RAL color palette)
Sales conditions and other information to be agreed with the Norlys Sales Department.

Inrush current	6,7A / 2,4µs

Maximum number of luminaires of this type per MCB:

B 10A: 46, B 16A: 74, C 10A: 74, C 16A: 119

Spare parts

ZS2270zx0009	Repair kit.


Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE

LILLEHAMMER 2270



Indexes

Index	Color	RAL
2270AL	ALUMINUM	9006
2270BL	BLACK	9005
2270GR	GRAPHITE	7016
2270WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
PCC Cert CERTIFICATE ISO 14001
RoHS 2011/65/UE