


NORLYS LILLEHAMMER 2271

Lillehammer
2271XX0009
14.10.2026 v.09.6
www.norlys.no



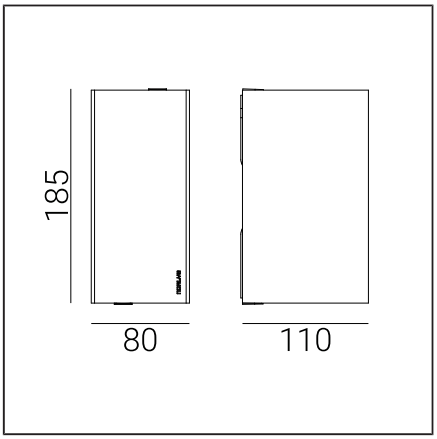

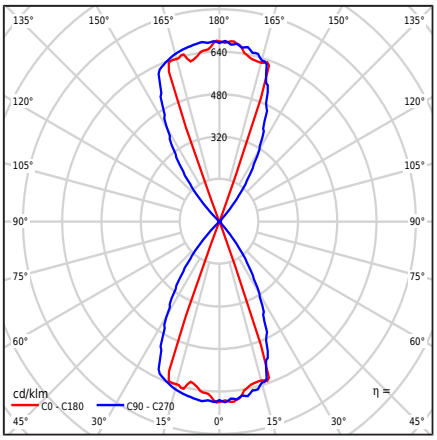

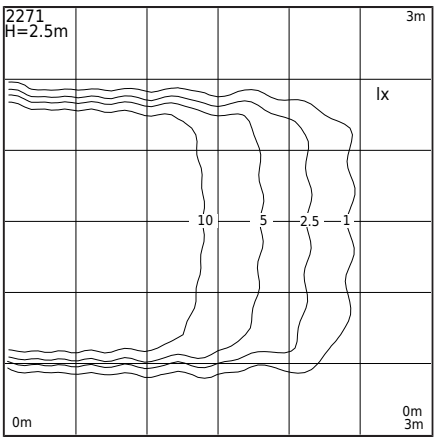

Type of luminaire

Type of luminaire	Wall light,
Photometric body	Double-sided light with 60° beam angle facing up and down.
Characteristics of the luminaire	A luminaire with a wide range of applications, including lighting: wall surfaces, facades, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - safety glass, transparent. Silicone gasket. EPDM cable gland.
Mounting method	Fixture mounting: 2 holes ø5mm spacing 45x130mm. According to the attached installation instructions.
Terminal	Connecting terminals: max 5x1.5mm², possibility to connect fixtures in a loop max 5x1.5mm². Cable in a round sheath with a diameter in the range of ø7...10.5 mm.
Type of light source	LED module, DALI / TD electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control - DALI system
Luminaire weight net / gross	1,6kg / 1,75kg
Box dimensions [cm]	21cm x 12,5cm x 10,5cm
Luminaire dimensions [cm]	18,5cm x 11cm x 8cm

Technical data

LED module	Cree DK180501 V8 JB2835 3V 3K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	5,6W
Luminaire wattage	7,3W
Lamp luminous flux	1008lm
Luminaire luminous flux	224lm
Efficiency of the luminaire	30,7lm/W
ULOR	50%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	≥0.88
THD factor	13%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally the fixture is also available:
- for a different color of the fixture (according to the RAL color palette)
Terms of sale and other information, after consultation with the Sales Department of Norlys.

Inrush current	6,7A / 2,4µs
BUG rating	B0-U3-G0

Maximum number of luminaires of this type per MCB:

B 10A: 46, B 16A: 74, C 10A: 74, C 16A: 119

Spare parts

ZS2271zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
TÜVRheinland CERTIFIED
www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, familiarize yourself with the instructions provided with the fixture.
Installation and service work should be carried out by a person with appropriate authorization and qualifications, in accordance with the applicable regulations.
Due to the dynamic development of lighting technology, additional information is available upon customer request.
Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture..

LILLEHAMMER 2271



Indexes

Index	Color	RAL
2271AL	ALUMINUM	9006
2271BL	BLACK	9005
2271GR	GRAPHITE	7016
2271WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System
ISO 9001:2015
IATF 16949:2016
www.tuv.com
ID 9108651873

PCC Cert
CERTIFICATE
ISO 14001

RoHS 2011/65/UE

Before starting the installation, familiarize yourself with the instructions provided with the fixture.
Installation and service work should be carried out by a person with appropriate authorization and qualifications, in accordance with the applicable regulations.
Due to the dynamic development of lighting technology, additional information is available upon customer request.
Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture..