


NORLYS EGERSUND MINI 2303

Egersund mini
2303XX0009
14.10.2026 v.09.11
www.norlys.no



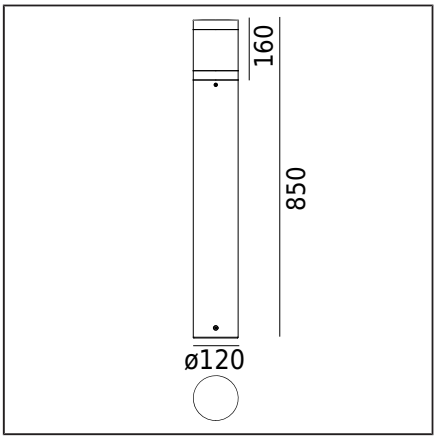

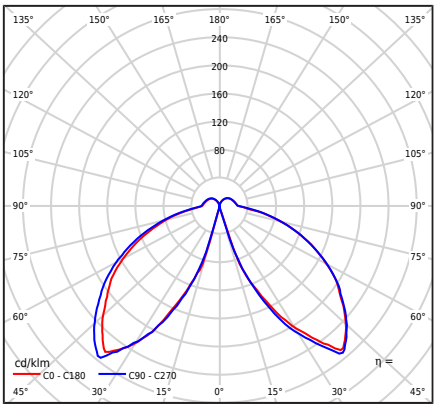

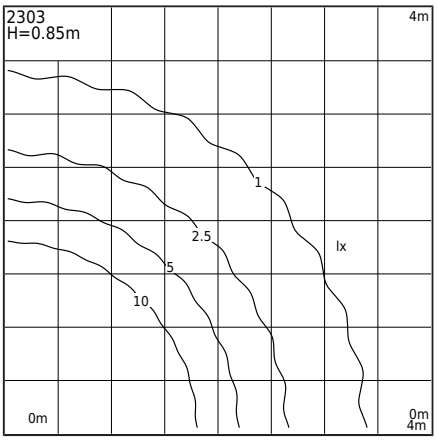

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Light with rotationally symmetrical light distribution.
Characteristics of the luminaire	A fixture with contemporary design. Suitable for lighting gardens and other private areas as well as public spaces.

General information

Materials	Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket.
Mounting method	Fixture mounting: 3 holes ø9mm on diameter ø65mm at 120° intervals. According to the included installation instructions. Other accessories must be purchased separately.
Terminal	Connection terminals: max 4x4mm², possible looping of the fixture with max 4x2.5mm². Cable with a round sheath of max ø14mm diameter.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control - DALI system
Box dimensions [cm]	16cm x 16cm x 93cm
Luminaire dimensions [cm]	12cm x 12cm x 85cm

Technical data

LED module	Cree DK210704 V2 JB2835 3V 4K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 (User manual)
Light source wattage	7,4W
Luminaire wattage	9,6W
Lamp luminous flux	1462lm
Luminaire luminous flux	934lm
Efficiency of the luminaire	97,3lm/W
ULOR	11%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,95
THD factor	<10%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- in a safety version for Class I
- with a 2700K LED color temperature [1/1]
- with a different luminous flux value
- with a surge protection device (SPD)
- in different luminaire colors (according to the RAL color palette)
- with a different luminaire height

Terms of sale and further information are available upon agreement with the Sales Department of Norlys.

Inrush current	20A / 200µs
BUG rating	B1-U3-G1

Maximum number of luminaires of this type per MCB:

B 10A: 10, B 16A: 30, C 10A: 31, C 16A: 51

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016 TÜVRheinland CERTIFIED www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, refer to the instruction manual attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided upon the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

Accessories sold separately

3086GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Spare parts

ZS2303zx0009	Electrical repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
2303AL	ALUMINUM	9006
2303GR	GRAPHITE	7016

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, refer to the instruction manual attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided upon the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.