

NORLYS EGERSUND MINI 2315


AC 220-240V 50-60Hz | IP 65 | LED | DALI

Egersund mini
2315XX0009
16.09.2026 v.09.9
www.norlys.no



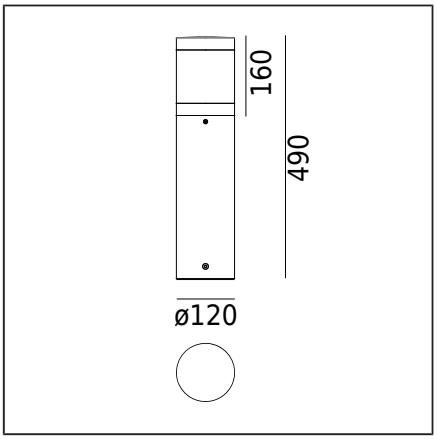

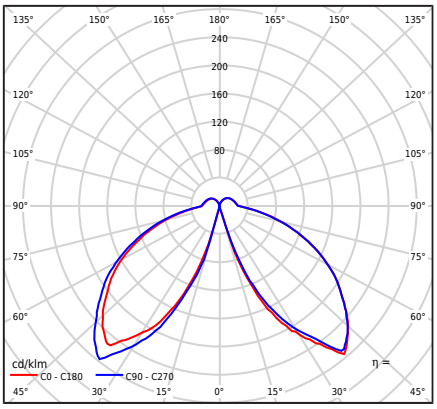

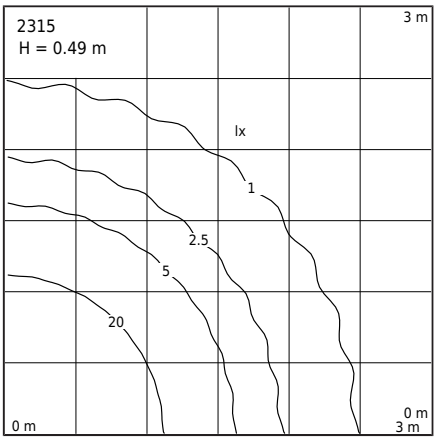

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Light with rotationally symmetrical light distribution.
Characteristics of the luminaire	A fixture with contemporary design. For illuminating gardens, private areas, parks, and other architectural concepts.

General information

Materials	Powder painted aluminum cast. Lens - transparent plastic PMMA. Silicone gasket.
Mounting method	Fixture mounting: 3 holes ø9mm, on a ø65mm diameter at 120°. According to the included instructions. Other accessories must be purchased separately.
Terminal	Connection terminals: max 4x4mm², possibility of connecting fixtures in a loop max 4x2.5mm². Cable with a round sheath of diameter max ø14mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control - DALI system
Box dimensions [cm]	57cm x 16cm x 16cm
Luminaire dimensions [cm]	49cm x 12cm x 12cm

Technical data

LED module	Cree DK210704 V2 JB2835 3V 4K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2 (User manual)
Light source wattage	7,4W
Luminaire wattage	9,1W
Lamp luminous flux	1462lm
Luminaire luminous flux	915lm
Efficiency of the luminaire	100,5lm/W
ULOR	11%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,95
THD factor	< 10%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the fixture is also available:
- in a safety version for KL I
- with LED color 2700K [1/1]
- with a different luminous flux value
- with a surge protection device (SPD)
- in a different fixture color (according to the RAL color palette)
- with a different fixture height

Sales conditions and additional information are available upon agreement with the Norlys Sales Department.

Inrush current	20A / 200µs
BUG rating	B1-U3-G1

Accessories sold separately

3086GA0009	Mounting adapter
205ZX0010	Concreting anchor
206GA0010	Ground anchor
206GA0S10	Adapter for concrete foundation

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before beginning the installation, please refer to the manual included with the fixture. Due to the dynamic development of lighting technology, additional information is available upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

Spare parts

ZS2315zx0009	Service set.

Files to download

Photometric LDT files	Photometric IES files
Manual	BIM Revit
BIM ArchiCAD	

Indexes

Index	Color	RAL
2315AL	ALUMINUM	9006
2315GR	GRAPHITE	7016

Other colors according to the "Colors Template" pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before beginning the installation, please refer to the manual included with the fixture. Due to the dynamic development of lighting technology, additional information is available upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.