


NORLYS HELLVIK 2400


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

HellVik 2400XX0010
29.10.2026 v.10.9
www.norlys.no

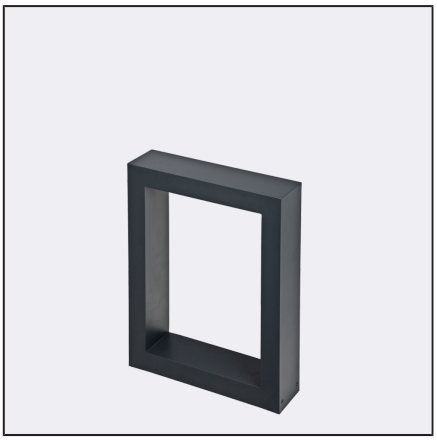

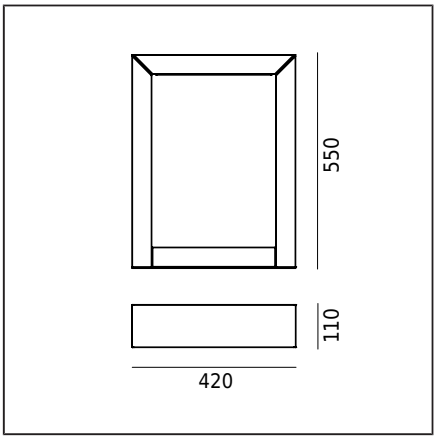

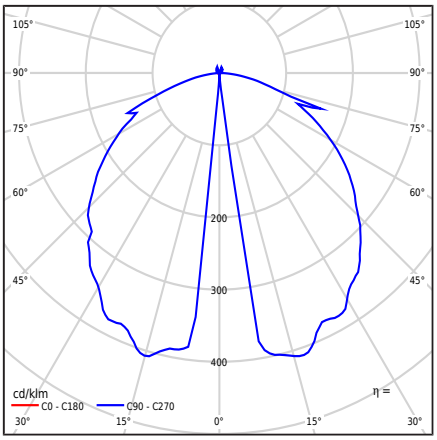

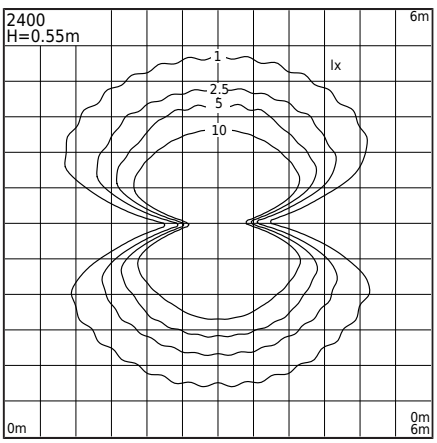

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffused light, covered from the top.
Characteristics of the luminaire	Fixture with contemporary design. For lighting gardens, private areas, and other architectural applications.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	The anchor for embedding is included. Installation must be carried out according to the enclosed instructions. Other accessories must be purchased separately.
Terminal	Connection terminals: max 2x4mm², possibility of looping the fixture max 2x4mm². Cable in a round casing with a maximum diameter of ø12.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	7,94kg / 8,66kg
Box dimensions [cm]	46cm x 15cm x 57cm
Luminaire dimensions [cm]	42cm x 11cm x 55cm

Technical data

LED module	Cree DK200305 V3 JB2835 3V 3K (Datasheet)
Driver	Yes
Light source wattage	5,2W
Luminaire wattage	6,9W
Lamp luminous flux	978lm
Luminaire luminous flux	531lm
Efficiency of the luminaire	77lm/W
ULOR	5%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,8
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the fixture is also available:
- in the safety version for Class I
- for LED color temperature 2700K [1/1]
- for a different luminous flux value
- in the version with a surge protection device (SPD)
- for a different fixture color (according to the RAL color palette)
- for a different fixture height

Terms of sale and other information, upon agreement with the Norlys Sales Department.

BUG rating	B0-U2-G0

Accessories sold separately

209GA0009	Ground anchor
209GA0S09	Adapter for concrete foundation

Spare parts

ZS2400zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please read the instructions included with the fixture. Installation and maintenance work should be carried out by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided upon the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.

Indexes

Index	Color	RAL
2400AL	ALUMINUM	9006
2400BL	BLACK	9005
2400CG	CEMENT GREY	7033
2400CB	COPPER BROWN	8004
2400CS	CORTEN STEEL	approx. 8011
2400GM	GRAIN MINERAL	-
2400GR	GRAPHITE	7016
2400GB	GREY BEIGE	7006
2400WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please read the instructions included with the fixture. Installation and maintenance work should be carried out by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided upon the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.