


# NORLYS HELLVIK 2401


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

HellVik 2401XX0010
29.10.2026 v.10.8
www.norlys.no

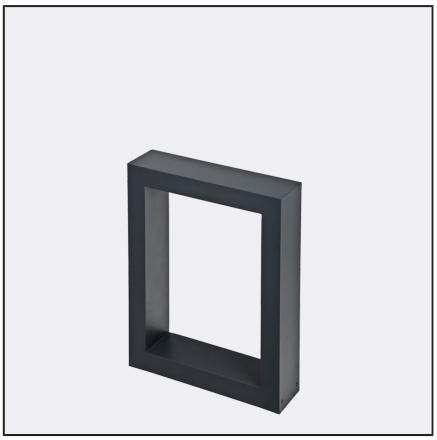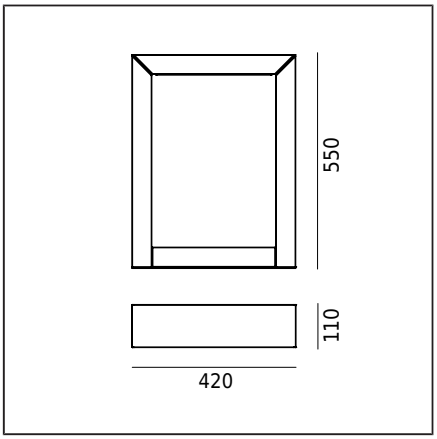

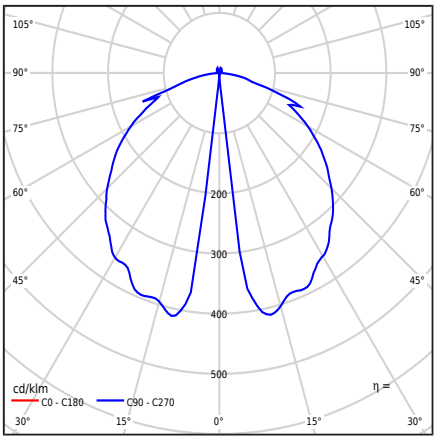


## Type of luminaire
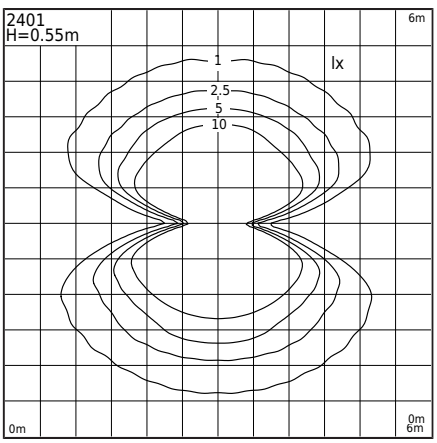
| | |
|---|---|
| Type of luminaire | Post light fixture. |
| Photometric body | Diffused light, covered from the top. |
| Characteristics of the luminaire | A luminaire with contemporary design.<br>For lighting gardens, private areas, and other architectural applications. |

## General information

| | |
|---|---|
| Materials | Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. |
| Mounting method | The anchor for embedding in concrete is included.<br>Installation should be carried out according to the attached instructions.<br>Other accessories must be purchased separately. |
| Terminal | Connection terminals: max 2x4mm²,<br>fixture loop connection capability max 2x4mm².<br>Cable with a round jacket diameter max ø12.5mm. |
| Type of light source | LED module, electronic power supply<br>Replaceable (LED only) light source by a professional.<br>Replaceable control gear by a professional. |
| Light control | Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE) |
| Luminaire weight net / gross | 7,94kg / 8,66kg |
| Box dimensions [cm] | 46cm x 15cm x 57cm |
| Luminaire dimensions [cm] | 42cm x 11cm x 55cm |

## Technical data

| | |
|---|---|
| LED module | Cree DK200305 V3 JB2835 3V 4K (Datasheet) |
| Driver | Yes |
| Light source wattage | 5,2W |
| Luminaire wattage | 6,9W |
| Lamp luminous flux | 978lm |
| Luminaire luminous flux | 575lm |
| Efficiency of the luminaire | 83,3lm/W |
| ULOR | 4% |
| Color temperature | 4000K |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Colour rendering index CRI | 80 |
| L80TM-21 [wg LM-80] | >102 000h |
| L90 TM-21 [wg LM-80] | >52 600h |
| Power Factor luminaire | PF 0,8 |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |

This product contains light source of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- in a safety version for Class I
- for LED color 2700K [1/1]
- for a different luminous flux value
- in a version with a surge protection device (SPD)
- for a different luminaire color (according to the RAL color palette)
- for a different luminaire height

Terms of sale and additional information upon agreement with the Sales Department of Norlys.

| | |
|---|---|
| BUG rating | B0-U2-G0 |

## Accessories sold separately

| | |
|---|---|
| 209GA0009 | Ground anchor |

## Spare parts

| | |
|---|---|
| ZS2400zx0009 | Repair kit. |

## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| Manual | |

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, read the instructions attached to the fixture. Installation and service work are conducted by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of fixture quality.

# HELLVIK 2401



## Indexes

| Index | Color | RAL |
|---|---|---|
| 2401AL | ALUMINUM | 9006 |
| 2401BL | BLACK | 9005 |
| 2401CG | CEMENT GREY | 7033 |
| 2401CB | COPPER BROWN | 8004 |
| 2401CS | CORTEN STEEL | approx. 8011 |
| 2401GM | GRAIN MINERAL | - |
| 2401GR | GRAPHITE | 7016 |
| 2401GB | GREY BEIGE | 7006 |
| 2401WH | WHITE | 9003 |

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the installation, read the instructions attached to the fixture. Installation and service work are conducted by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the deterioration of fixture quality.