


NORLYS HELLVIK 2402


IP 65 | IK 08 | LED | DALI

Hellvik 2402XX0009
12.11.2026 v.09.26
www.norlys.no

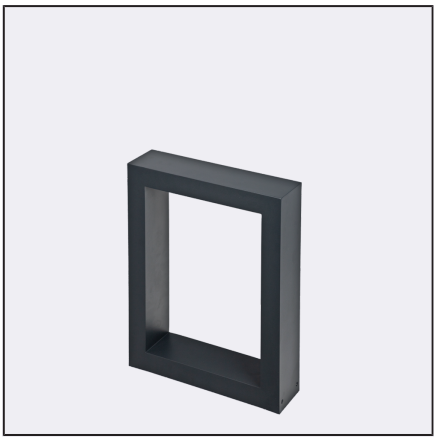

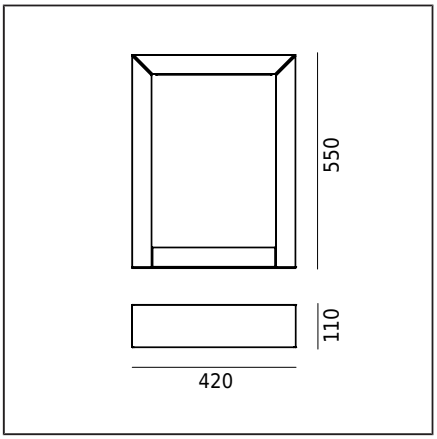

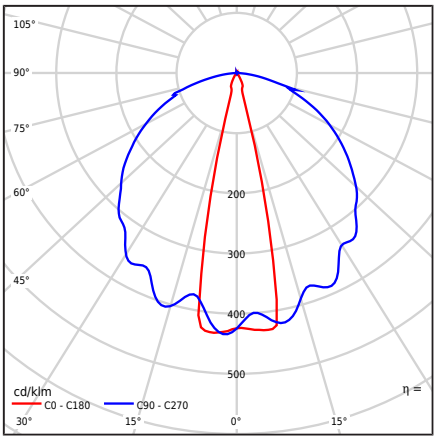

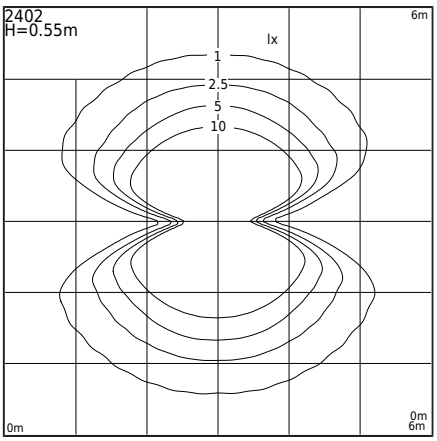

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffused light, covered from the top.
Characteristics of the luminaire	A fixture with contemporary design. For the lighting of gardens, private areas, and other architectural applications.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	The anchoring bolt is included. Installation should be carried out according to the attached instructions. Other accessories must be purchased separately.
Terminal	Terminal clamps: max 4x 4 mm², possibility of connecting a fixture in a loop max 4x2.5 mm². Round cable jacket with a maximum diameter of ø12.5mm.
Type of light source	LED module, DALI electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control - DALI system
Luminaire weight net / gross	7,94kg / 8,66kg
Box dimensions [cm]	46cm x 15cm x 57cm
Luminaire dimensions [cm]	42cm x 11cm x 55cm

Technical data

LED module	Cree DK200305 V3 JB2835 3V 3K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	7,5W
Luminaire wattage	10,1 W
Lamp luminous flux	1344lm
Luminaire luminous flux	670lm
Efficiency of the luminaire	66,3lm/W
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	0,95
THD factor	<10%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the fixture is also available:
- for LED color 2700K [1/1].
- for a different value of luminous flux.
- in a version with a surge protection device (SPD).
- for a different color of the fixture (according to the RAL color palette).
- for a different height of the fixture.

Terms of sale and additional information available upon agreement with the Norlys Sales Department.

Inrush current	5A / 50µs
BUG rating	B0-U2-G0

Maximum number of luminaires of this type per MCB:

B 10A: 31, B 16A: 50, C 10A: 52, C 16A: 85

Accessories sold separately

209GA0009	Ground anchor
209GA0S09	Adapter for concrete foundation

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please read the instructions attached to the luminaire.
The assembly and service work should be carried out by a person with the appropriate authorizations and qualifications, in accordance with the applicable regulations.
Due to the dynamic development of lighting technology, additional information is provided at the request of the customer.
Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire.

Spare parts

ZS2402zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
2402AL	ALUMINUM	9006
2402BL	BLACK	9005
2402CG	CEMENT GREY	7033
2402CB	COPPER BROWN	8004
2402CS	CORTEN STEEL	approx. 8011
2402GM	GRAIN MINERAL	-
2402GR	GRAPHITE	7016
2402GB	GREY BEIGE	7006
2402WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, please read the instructions attached to the luminaire.
The assembly and service work should be carried out by a person with the appropriate authorizations and qualifications, in accordance with the applicable regulations.
Due to the dynamic development of lighting technology, additional information is provided at the request of the customer.
Condensation that may occur in the luminaires is a natural phenomenon and does not affect the quality of the luminaire.