


NORLYS HELLVIK 2404


IP 65 | IK 08 | AC 220-240V 50-60Hz | LED | DIM

HellVik 2404XX0009
29.10.2026 v.09.17
www.norlys.no

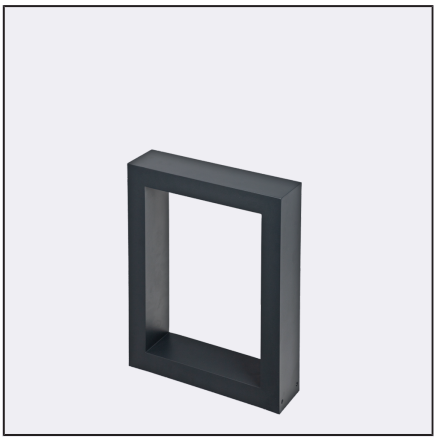

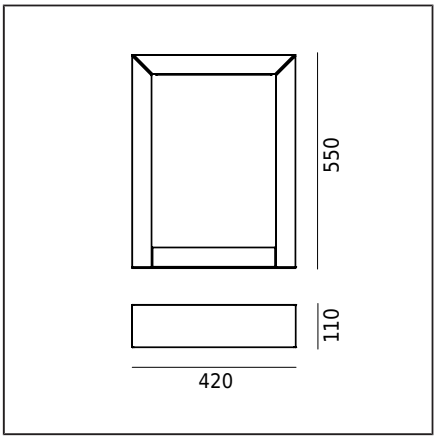

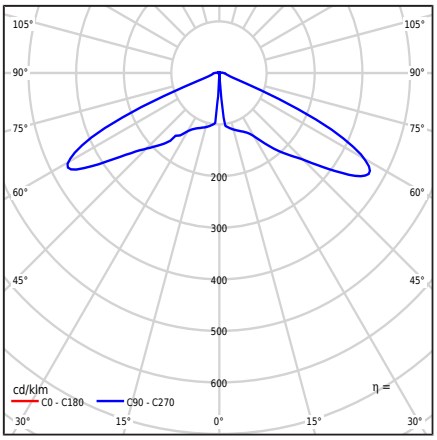

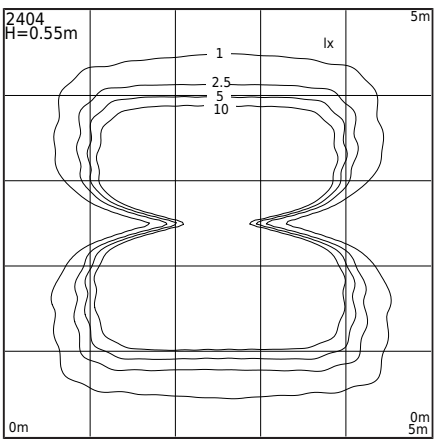

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffused light, covered from the top.
Characteristics of the luminaire	A fixture with contemporary design. For lighting gardens, private areas, and other architectural applications.

General information

Materials	Powder painted aluminum cast. The outer hermetic lens - transparent PMMA plastic Silicone gasket.
Mounting method	The concrete anchor is included. Installation must be carried out according to the enclosed instructions. Other accessories must be purchased separately.
Terminal	Connection terminals: max 2x4mm², possibility of connecting the fixture in a loop max 2x4mm². Cable in a round sheath with a diameter max Ø12.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	7,94kg / 8,66kg
Box dimensions [cm]	46cm x 15cm x 57cm
Luminaire dimensions [cm]	42cm x 11cm x 55cm

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G5 3K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Light source wattage	6,5W
Luminaire wattage	8W
Lamp luminous flux	1159lm
Luminaire luminous flux	1038lm
Efficiency of the luminaire	129,8lm/W
ULOR	3%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM5
Flicker of light (Pst LM)	≤0.3
Strobe effect (SVM)	≤0.7
Colour rendering index CRI	70
L90B10 [wg LM-80]	>100 000h
Power Factor luminaire	PF 0,8
THD factor	20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class D / EPREL

Optionally, the luminaire is also available:
- in a safety version for KL I
- for a different luminous flux value
- in a different luminaire color (according to the RAL color palette)

Terms of sale and additional information are available upon agreement with the Sales Department of Norlys.

Inrush current	1,65A/16,5µs]
BUG rating	B0-U2-G0

Accessories sold separately

209GA0009	Ground anchor
209GA0S09	Adapter for concrete foundation

Spare parts

4699100402	LED module.
46999610	Power supply.
ZS2404zx0009	Repair kit.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please read the instructions attached to the fixture. Installation and service work must be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided upon customer request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
2404AL	ALUMINUM	9006
2404BL	BLACK	9005
2404CG	CEMENT GREY	7033
2404CB	COPPER BROWN	8004
2404CS	CORTEN STEEL	approx. 8011
2404GM	GRAIN MINERAL	-
2404GR	GRAPHITE	7016
2404GB	GREY BEIGE	7006
2404WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please read the instructions attached to the fixture. Installation and service work must be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided upon customer request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.