

NORLYS HELLVIK 2410


IP 65 | IK 08 | AC 220-240V 50-60Hz | LED | DIM

HellVik 2410XX0010
29.10.2026 v.10.6
www.norlys.no



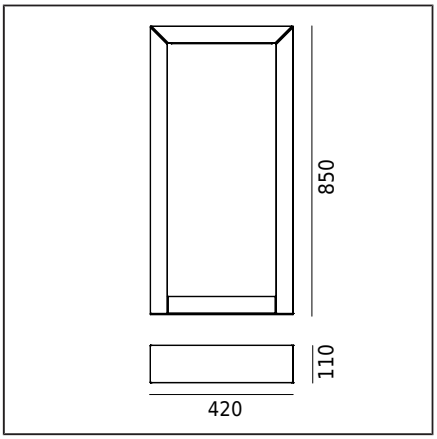

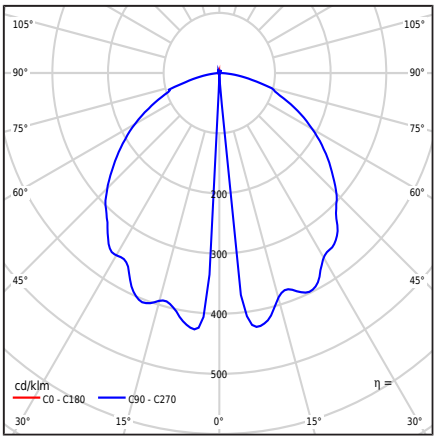

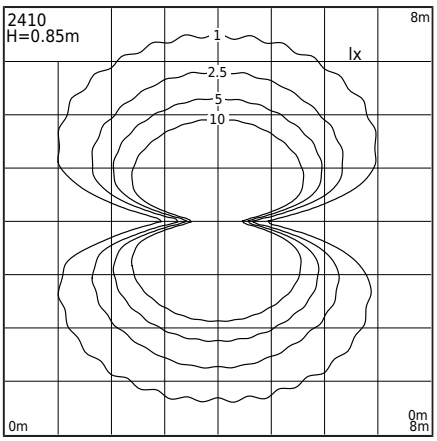

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffused light, covered from the top.
Characteristics of the luminaire	A fixture with contemporary design. For lighting gardens, private areas, and other architectural applications.

General information

Materials	Powder painted aluminum cast. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	The concrete anchor is included. Installation should be carried out according to the attached instructions. Other accessories should be purchased separately.
Terminal	Connection terminals: max 2x4mm², possibility of looping the fixture: max 2x2.5mm². Round cable diameter max ø12.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire weight net / gross	9,14kg / 10,09kg
Box dimensions [cm]	46cm x 15cm x 91cm
Luminaire dimensions [cm]	42cm x 11cm x 85cm

Technical data

LED module	Cree DK200305 V3 JB2835 3V 3K (Datasheet)
Driver	Yes
Light source wattage	10,5W
Luminaire wattage	11,8W
Lamp luminous flux	1956lm
Luminaire luminous flux	1014lm
Efficiency of the luminaire	85,9lm/W
ULOR	4%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF 0,8
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- in a safety version for KL I
- with LED color temperature of 2700K [1/1]
- with a different luminous flux value
- in a version with a surge protection device (SPD)
- in a different luminaire color (according to the RAL color palette)
- with a different luminaire height

Sales conditions and additional information are available upon agreement with the Norlys Sales Department.

BUG rating	B1-U2-G1

Accessories sold separately

209GA0009	Ground anchor
209GA0S09	Adapter for concrete foundation

Spare parts

ZS2400zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please refer to the instructions attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided upon customer request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the degradation of the fixture quality.

Indexes

Index	Color	RAL
2410AL	ALUMINUM	9006
2410BL	BLACK	9005
2410CG	CEMENT GREY	7033
2410CB	COPPER BROWN	8004
2410CS	CORTEN STEEL	approx. 8011
2410GM	GRAIN MINERAL	-
2410GR	GRAPHITE	7016
2410GB	GREY BEIGE	7006
2410WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please refer to the instructions attached to the fixture. Due to the dynamic development of lighting technology, additional information is provided upon customer request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the degradation of the fixture quality.