

NORLYS HELLVIK 2415


AC 220-240V 50-60Hz | IP 65 | IK 08 | LED | DIM

HellVik 2415XX0009
29.10.2026 v.09.17
www.norlys.no



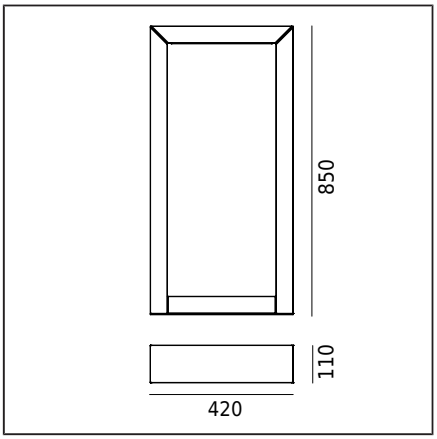

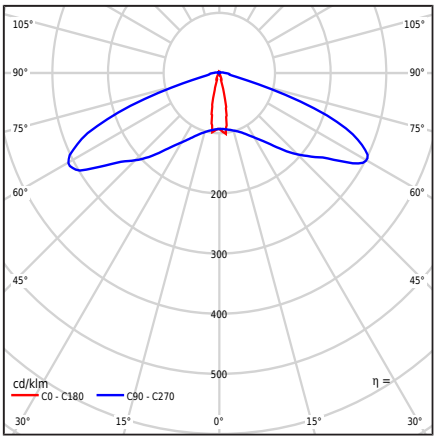

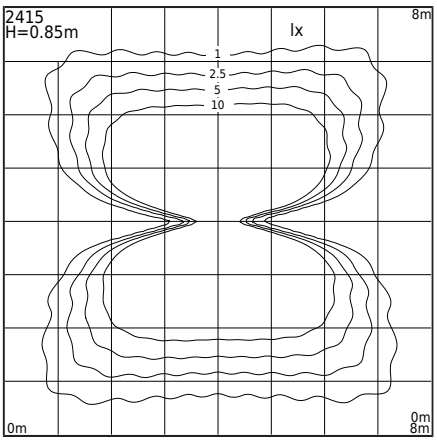

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffused light, covered from the top.
Characteristics of the luminaire	A fixture with contemporary design. For garden lighting, private areas, and other architectural applications.

General information

Materials	Powder painted aluminum cast. The outer hermetic lens - transparent PMMA plastic Silicone gasket.
Mounting method	The anchor for concreting is included. Assembly should be carried out according to the attached instructions. Other accessories must be purchased separately.
Terminal	Connection terminals: max 2x4mm², possibility to connect the fixture in a loop max 2x4mm². Round cable with a diameter of max ø12.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Trailing edge (TE) dimming
Luminaire weight net / gross	9,32kg / 10,49kg
Box dimensions [cm]	46cm x 15cm x 91cm
Luminaire dimensions [cm]	42cm x 11cm x 85cm

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G5 4K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Light source wattage	6,5W
Luminaire wattage	8,1W
Lamp luminous flux	1254lm
Luminaire luminous flux	1007lm
Efficiency of the luminaire	124,3lm/W
ULOR	3%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM5
Flicker of light (Pst LM)	≤0.3
Strobe effect (SVM)	≤0.7
Colour rendering index CRI	70
L90B10 [wg LM-80]	>100 000h
Power Factor luminaire	PF 0,8
THD factor	20%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class D / EPREL

Optionally, the fixture is also available:
- in a safety version for Class I
- for a different luminous flux value
- for a different fixture color (according to the RAL color palette)

Terms of sale and additional information are subject to agreement with the Sales Department of Norlys.

Inrush current	1,65A/16,5µs]
BUG rating	B1-U2-G1

Maximum number of luminaires of this type per MCB:

B 10A: 157

Accessories sold separately

209GA0009	Ground anchor
209GA0S09	Adapter for concrete foundation

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please read the instructions attached to the fixture. Installation and servicing works should be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.

Spare parts

4699100403	LED module.
46999610	Power supply.
ZS2415zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
2415AL	ALUMINUM	9006
2415BL	BLACK	9005
2415CG	CEMENT GREY	7033
2415CB	COPPER BROWN	8004
2415CS	CORTEN STEEL	approx. 8011
2415GM	GRAIN MINERAL	-
2415GR	GRAPHITE	7016
2415GB	GREY BEIGE	7006
2415WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please read the instructions attached to the fixture. Installation and servicing works should be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided at the customer's request. Condensation that may occur in the fixtures is a natural phenomenon and does not affect the quality of the fixture.