

NORLYS HELLVIK 2417


IP 65 | IK 08 | LED | DALI2

Hellvik 2417XX0009
29.10.2026 v.09.21
www.norlys.no



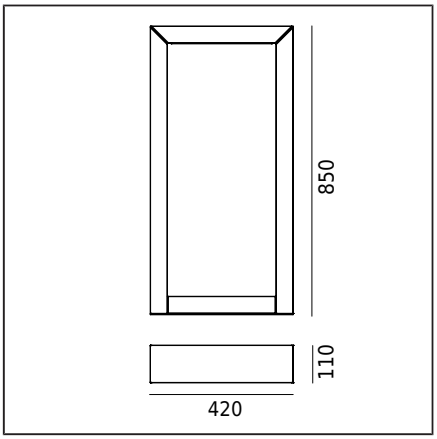

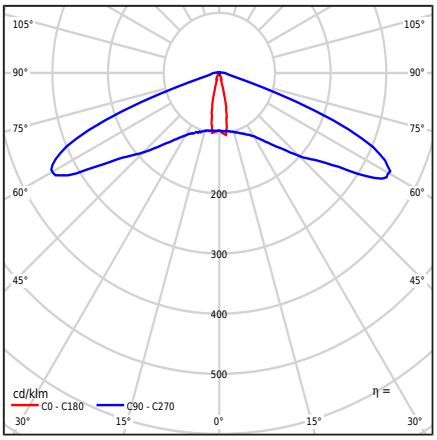

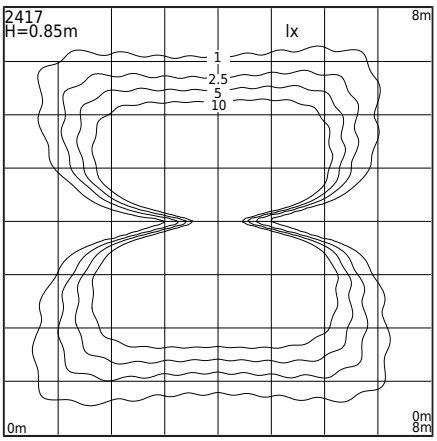

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffused light, covered from the top.
Characteristics of the luminaire	Contemporary design luminaire. For lighting gardens, private areas, and other architectural applications. Suitable for emergency installations on DC voltage: DC 176 ÷ 276V

General information

Materials	Powder painted aluminum cast. The outer hermetic lens - transparent PMMA plastic Silicone gasket.
Mounting method	The anchor for embedding is included. Installation should be carried out according to the attached instructions. Other accessories must be purchased separately.
Terminal	Connection terminals: max 5x2.5mm², possibility to connect the fixture in a loop max 5x2.5mm². Cable in a round sheath with a maximum diameter of ø12.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control - DALI system
Luminaire weight net / gross	9,27kg / 11,15kg
Box dimensions [cm]	46cm x 15cm x 90cm
Luminaire dimensions [cm]	42cm x 11cm x 85cm

Technical data

LED module	Philips Fortimo FastFlex LED 2x6 DP G5 4K (Datasheet)
Driver	Yes
Driver durability	50000h
Light source wattage	9,9W
Luminaire wattage	11,9W
Lamp luminous flux	1831lm
Luminaire luminous flux	1466lm
Efficiency of the luminaire	123,2lm/W
ULOR	3%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM5
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	70
L90B10 [wg LM-80]	>100 000h
Power Factor luminaire	PF 0,95
THD factor	<10%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class D / EPREL

Optionally, the fixture is also available:
- for different luminous flux values
- for different fixture colors (according to the RAL color palette)
Terms of sale and additional information, upon agreement with the Norlys Sales Department.
Luminaire au design contemporain.
Pour l'éclairage des jardins, des terrains privés et autres applications architecturales.
Convient pour les installations d'urgence à tension continue : CC 176 ÷ 276V.

Inrush current	20A / 200µs
BUG rating	B1-U2-G1

Maximum number of luminaires of this type per MCB:

B 10A: 10, B 16A: 30, C 10A: 31, C 16A: 51

Accessories sold separately

209GA0009	Ground anchor
209GA0S09	Adapter for concrete foundation

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016 TÜVRheinland CERTIFIED www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please read the instructions attached to the fixture. Installation and maintenance work should be carried out by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is available upon request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

Spare parts

4699100403	LED module.
4699210400	Power supply.
ZS2417zx0009	Repair kit.

Files to download

Photometric LDT files	Photometric IES files
Manual	

Indexes

Index	Color	RAL
2417AL	ALUMINUM	9006
2417BL	BLACK	9005
2417CG	CEMENT GREY	7033
2417CB	COPPER BROWN	8004
2417CS	CORTEN STEEL	approx. 8011
2417GM	GRAIN MINERAL	-
2417GR	GRAPHITE	7016
2417GB	GREY BEIGE	7006
2417WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please read the instructions attached to the fixture. Installation and maintenance work should be carried out by a person with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is available upon request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.