



NORLYS HELLVIK MINI 2430

Hellvik Mini
2430XX0009
26.10.2026 v.09.32
www.norlys.no

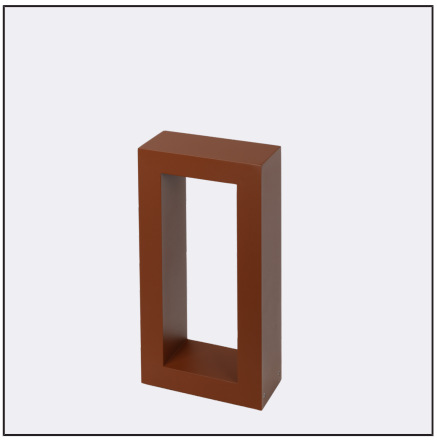

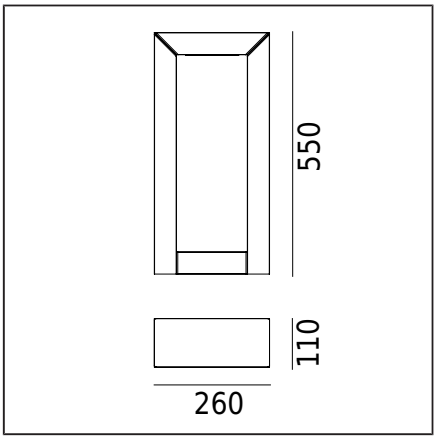

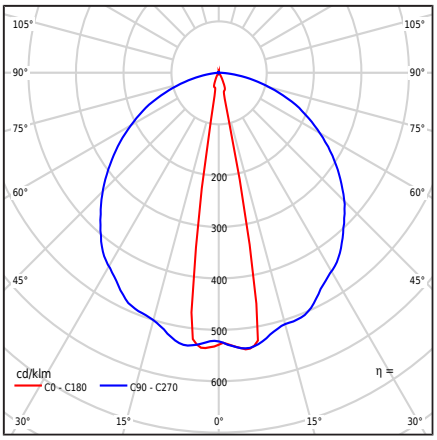

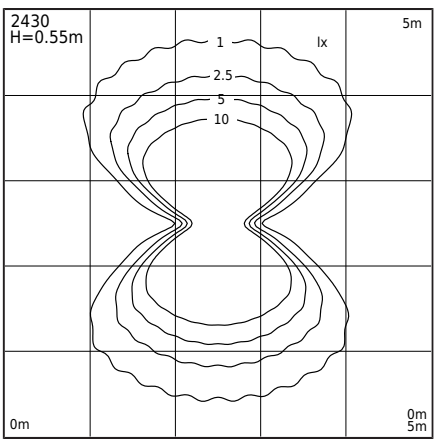

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffused light, covered from the top.
Characteristics of the luminaire	A fixture with contemporary design. For lighting gardens, private areas, and other architectural applications.

General information

Materials	Extruded aluminum profile, powder coated. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	According to the attached assembly instructions. Other accessories should be purchased separately.
Terminal	Connection terminals: max 3x2.5mm². Possibility to connect the fixture in a loop max 3x1.5mm². Round cable with a diameter up to ø12.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire dimensions [cm]	26cm x 11cm x 55cm

Technical data

LED module	Cree DK180501 V8 JB2835 3V 3K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Light source wattage	5,6W
Luminaire wattage	7,3W
Lamp luminous flux	1030lm
Luminaire luminous flux	429lm
Luminous intensity of the luminaire	237cd
Efficiency of the luminaire	58,8lm/W
ULOR	0.8%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the fixture is also available:
- For a different light flux value
- In a version with a Surge Protective Device (SPD)
- For a different fixture color (according to the RAL color palette)
- For a different fixture height

Sales conditions and other information upon agreement with Norlys' Sales Department.

Accessories sold separately

199GA0S09	Adapter for concrete foundation
199GA0009	Ground anchor

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016 TÜVRheinland CERTIFIED www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the assembly, read the instructions attached to the fixture. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with current regulations. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

HELLVIK MINI 2430

Indexes

Index	Color	RAL
2430AL	ALUMINUM	9006
2430BL	BLACK	9005
2430CG	CEMENT GREY	7033
2430CB	COPPER BROWN	8004
2430CS	CORTEN STEEL	approx. 8011
2430GM	GRAIN MINERAL	-
2430GR	GRAPHITE	7016
2430GB	GREY BEIGE	7006
2430WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873
CERTIFICATE ISO 14001
RoHS 2011/65/UE

Before starting the assembly, read the instructions attached to the fixture. Installation and service work is carried out by a person with appropriate authorizations and qualifications, in accordance with current regulations. Due to the dynamic development of lighting technology, we provide additional information at the customer's request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.