


NORLYS HELLVIK MINI 2431


IP 65 | IK 10 | LED | DIM

Hellvik Mini
2431XX0009
26.10.2026 v.09.17
www.norlys.no

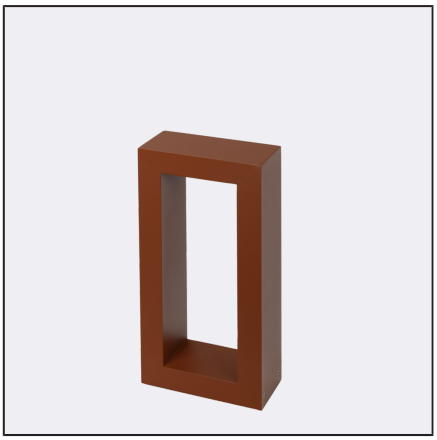

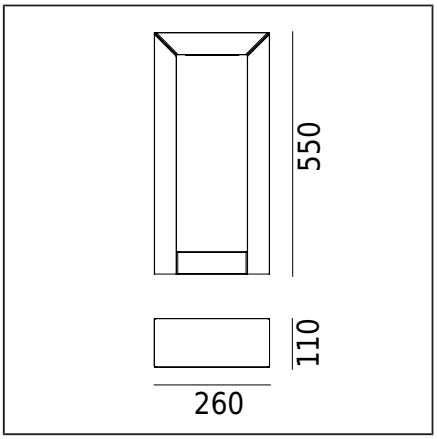

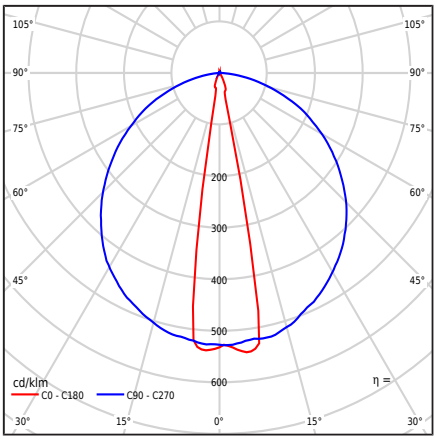

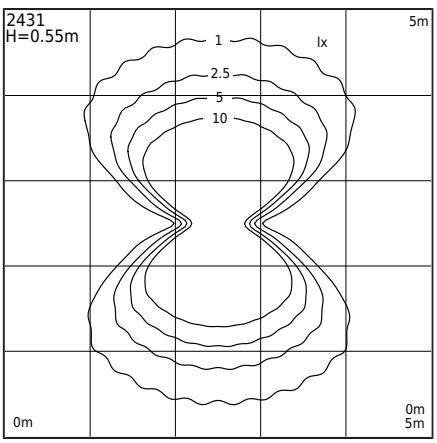

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffused light, covered from the top.
Characteristics of the luminaire	A fitting with contemporary design. For lighting gardens, private areas, and other architectural applications.

General information

Materials	Extruded aluminum profile, powder coated. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	According to the attached assembly instructions. Additional accessories must be purchased separately.
Terminal	Connection terminals: max 3x2.5mm². Possibility of looping the luminaire: max 3x1.5mm². Round cable with a maximum diameter of ø12.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE)
Luminaire dimensions [cm]	26cm x 11cm x 55cm

Technical data

LED module	Cree DK180501 V8 JB2835 3V 4K (Datasheet)
Driver	Yes
Driver durability	50000h
External control	Philips Xitanium TE (User manual)
Light source wattage	5,6W
Luminaire wattage	7,3W
Lamp luminous flux	1030lm
Luminaire luminous flux	449lm
Luminous intensity of the luminaire	245cd
Efficiency of the luminaire	61,5lm/W
ULOR	0,8%
Color temperature	4000K
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

The fitting is also optionally available:
- for a different luminous flux value
- with a surge protection device (SPD) version
- for a different color of the fitting (according to the RAL color palette)
- for a different fitting height

Sales terms and other information to be agreed with the Norlys Commercial Department.

Accessories sold separately

199GA0S09	Adapter for concrete foundation
199GA0009	Ground anchor

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before beginning the assembly, please refer to the instructions provided with the luminaire. Assembly and maintenance work should be carried out by an individual with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur within fixtures is a natural phenomenon and does not affect the quality of the fixture.

HELLVIK MINI 2431



Indexes

Index	Color	RAL
2431AL	ALUMINUM	9006
2431BL	BLACK	9005
2431CG	CEMENT GREY	7033
2431CB	COPPER BROWN	8004
2431CS	CORTEN STEEL	approx. 8011
2431GM	GRAIN MINERAL	-
2431GR	GRAPHITE	7016
2431GB	GREY BEIGE	7006
2431WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before beginning the assembly, please refer to the instructions provided with the luminaire. Assembly and maintenance work should be carried out by an individual with the appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur within fixtures is a natural phenomenon and does not affect the quality of the fixture.