


# NORLYS HELLVIK MINI 2441


IP 65 | IK 10 | LED | DIM

Hellvik Mini
2441XX0009
26.10.2026 v.09.11
www.norlys.no

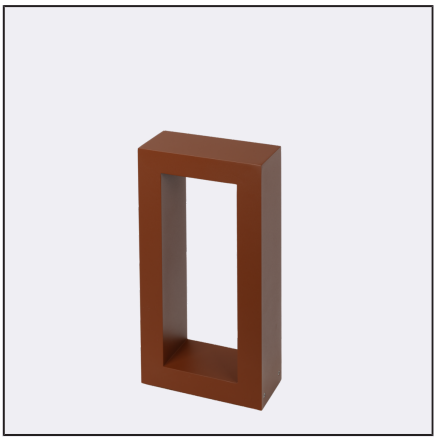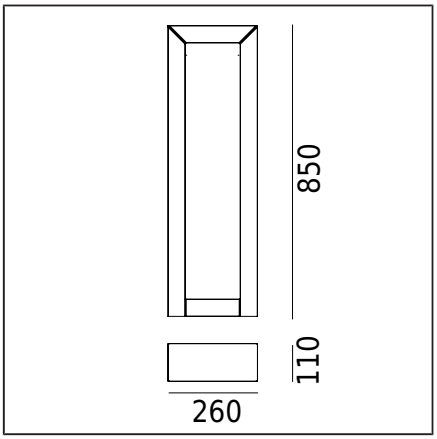

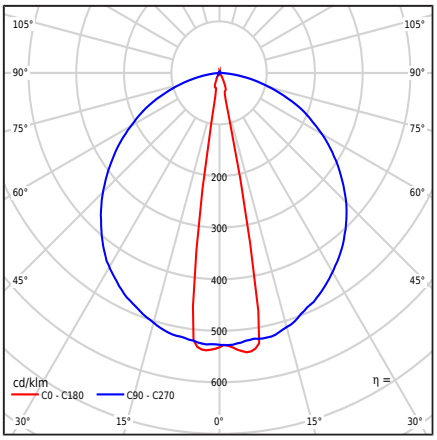


## Type of luminaire
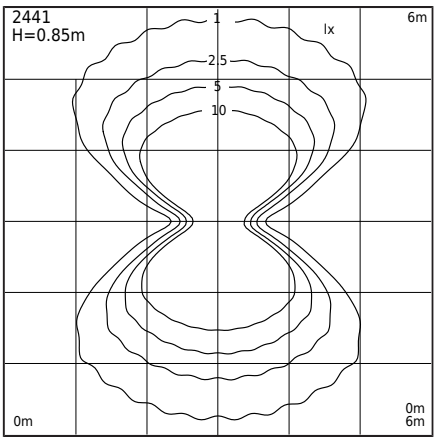
| | |
|---|---|
| Type of luminaire | Post light fixture. |
| Photometric body | Diffused light, covered from the top. |
| Characteristics of the luminaire | A fixture with contemporary design.<br>For lighting gardens, private areas, and other architectural applications. |

## General information

| | |
|---|---|
| Materials | Extruded aluminum profile, powder coated. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket. |
| Mounting method | According to the included assembly instructions.<br>Additional accessories must be purchased separately. |
| Terminal | Connection terminals: max 3x2.5mm².<br>Ability to connect the fixture in loops max 3x1.5mm².<br>Round sheath cable with a maximum diameter of ø12.5mm. |
| Type of light source | LED module, electronic power supply<br>Replaceable (LED only) light source by a professional.<br>Replaceable control gear by a professional. |
| Light control | Phase-dimming (TRIAC) TRAILING EDGE (TE) - LEADING EDGE (LE) |
| Luminaire dimensions [cm] | 26cm x 11cm x 55cm |

## Technical data

| | |
|---|---|
| LED module | Cree DK180501 V8 JB2835 3V 4K (Datasheet) |
| Driver | Yes |
| Driver durability | 50000h |
| Light source wattage | 5,6W |
| Luminaire wattage | 7,3W |
| Lamp luminous flux | 1030lm |
| Luminaire luminous flux | 449lm |
| Luminous intensity of the luminaire | 245cd |
| Efficiency of the luminaire | 61,5lm/W |
| ULOR | 0,8% |
| Color temperature | 4000K |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Colour rendering index CRI | 80 |
| L80TM-21 [wg LM-80] | >102 000h |
| L90 TM-21 [wg LM-80] | >52 600h |
| Power Factor luminaire | PF>0,89 |
| Ta Rated temperature | +25°C |
| Ambient operating temp. range | -20...+45°C |

This product contains light source of energy efficiency class C / EPREL

Optionally, the luminaire is also available:
- for a different luminous flux value
- with a surge protection device (SPD)
- for a different luminaire color (according to the RAL color palette)
- for a different luminaire height

Terms of sale and other information, upon agreement with the Sales Department of Norlys.

## Accessories sold separately

| | |
|---|---|
| 199GA0S09 | Adapter for concrete foundation |
| 199GA0009 | Ground anchor |

## Files to download

| | |
|---|---|
| Photometric LDT files | Photometric IES files |
| Manual | |


Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no


TÜVRheinland CERTIFIED — Management System ISO 9001:2015 IATF 16949:2016 — www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please read the instructions attached to the fixture. Installation and maintenance work should be carried out by a person with the appropriate authorization and qualifications, in accordance with the applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

# HELLVIK MINI 2441






## Indexes

| Index | Color | RAL |
|---|---|---|
| 2441AL | ALUMINUM | 9006 |
| 2441BL | BLACK | 9005 |
| 2441CG | CEMENT GREY | 7033 |
| 2441CB | COPPER BROWN | 8004 |
| 2441CS | CORTEN STEEL | approx. 8011 |
| 2441GM | GRAIN MINERAL | - |
| 2441GR | GRAPHITE | 7016 |
| 2441GB | GREY BEIGE | 7006 |
| 2441WH | WHITE | 9003 |

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert
CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before starting the installation, please read the instructions attached to the fixture. Installation and maintenance work should be carried out by a person with the appropriate authorization and qualifications, in accordance with the applicable regulations. Due to the dynamic development of lighting technology, we provide additional information upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.