



NORLYS HELLVIK MINI 2442

Hellvik Mini
2442XX0009
26.10.2026 v.09.11
www.norlys.no

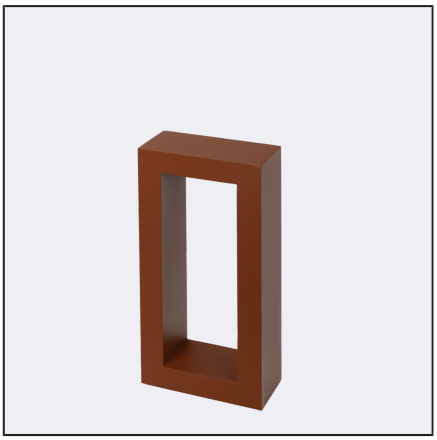

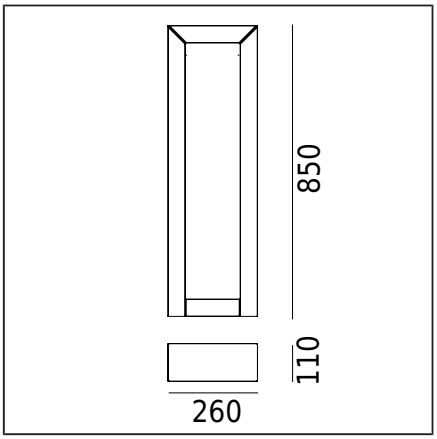

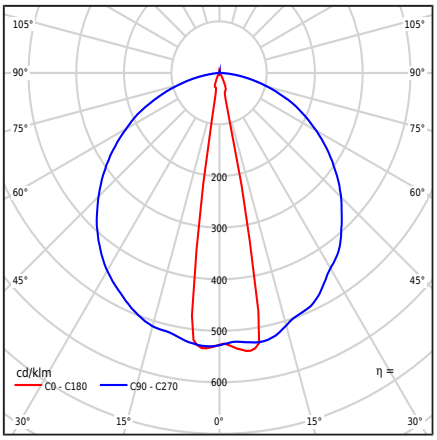

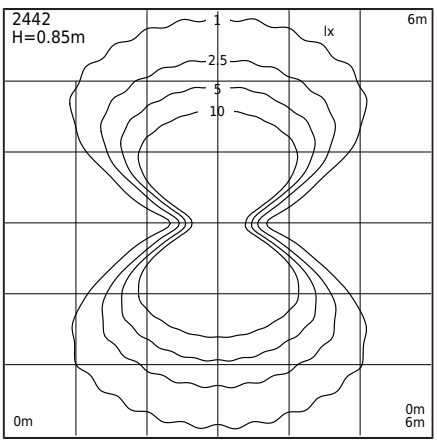

Type of luminaire

Type of luminaire	Post light fixture.
Photometric body	Diffused light, covered from the top.
Characteristics of the luminaire	A fixture with contemporary design. For lighting gardens, private areas, and other architectural applications.

General information

Materials	Extruded aluminum profile, powder coated. Lens - transparent polycarbonate with structure, UV stabilized. Silicone gasket.
Mounting method	According to the attached installation instructions. Other accessories must be purchased separately.
Terminal	Connectors: max 3x2.5mm². Possibility to connect the fixture in a loop max 3x1.5mm². Cable in a round sheath with a maximum diameter of ø12.5mm.
Type of light source	LED module, electronic power supply Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.
Light control	Light control in the system: DALI2/TD.
Luminaire dimensions [cm]	26cm x 11cm x 55cm

Technical data

LED module	Cree DK180501 V8 JB2835 3V 3K (Datasheet)
Driver	Yes
Driver durability	100000h
External control	DALI2-TD (User manual)
Light source wattage	5,6W
Luminaire wattage	8,7W
Lamp luminous flux	1030lm
Luminaire luminous flux	496lm
Luminous intensity of the luminaire	272cd
Efficiency of the luminaire	57lm/W
ULOR	0.8%
Color temperature	3000K
Colour consistency (McAdam ellipse)	SDCM3
Flicker of light (Pst LM)	≤1
Strobe effect (SVM)	≤0.4
Colour rendering index CRI	80
L80TM-21 [wg LM-80]	>102 000h
L90 TM-21 [wg LM-80]	>52 600h
Power Factor luminaire	PF>0,89
THD factor	13%
Ta Rated temperature	+25°C
Ambient operating temp. range	-20...+45°C

This product contains light source of energy efficiency class C / EPREL

Optionally, the fixture is also available:
- for a different luminous flux value
- in a version with a surge protection device (SPD)
- for a different fixture color (according to the RAL color palette)
- for a different fixture height

Terms of sale and other information are to be agreed with Norlys' Sales Department.

Inrush current	6,7A / 2,4µs

Accessories sold separately

199GA0S09	Adapter for concrete foundation
199GA0009	Ground anchor

Files to download

Photometric LDT files	Photometric IES files
Manual	

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

Management System ISO 9001:2015 IATF 16949:2016 TÜVRheinland CERTIFIED www.tuv.com ID 9108651873

PCC Cert CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before beginning assembly, please refer to the instructions attached to the fixture. Assembly and maintenance work must be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.

HELLVIK MINI 2442



Indexes

Index	Color	RAL
2442AL	ALUMINUM	9006
2442BL	BLACK	9005
2442CG	CEMENT GREY	7033
2442CB	COPPER BROWN	8004
2442CS	CORTEN STEEL	approx. 8011
2442GM	GRAIN MINERAL	-
2442GR	GRAPHITE	7016
2442GB	GREY BEIGE	7006
2442WH	WHITE	9003

Other colors according to the "Colors Template" / RAL pattern book - available on request, subject to agreement with Norlys' Sales Department.

Norlys AS
P.B 1014 Hoff, 0218
Oslo
Hovfaret 4B, 0275
Oslo
Norway
+47 24 12 40 11
firmapost@norlys.no

TÜVRheinland CERTIFIED
Management System ISO 9001:2015 IATF 16949:2016
www.tuv.com ID 9108651873

PCC Cert
CERTIFICATE ISO 14001

RoHS 2011/65/UE

Before beginning assembly, please refer to the instructions attached to the fixture. Assembly and maintenance work must be carried out by a person with appropriate authorizations and qualifications, in accordance with applicable regulations. Due to the dynamic development of lighting technology, additional information is provided upon customer request. Condensation that may occur in fixtures is a natural phenomenon and does not affect the quality of the fixture.